



温馨提示 /WARM PROMPT

- 一、本公司产品您可自由选择。图示仅为公司部分产品，印刷过程可能令资料的产品图片与实物有细微区别。
- 二、颜色与款式以实物为准，公司保留更改产品设计与规划的权利，最终解释权属本公司。
- 三、生产出厂的产品外形尺寸允许误差 $\pm 3\text{mm}$ 。
- 四、由于铝型材模具有更换现象，因此不同一批的铝型材厚度有 $\pm 0.1\text{mm}$ 误差正常。
- 五、同一扇门上不同型号的铝型材之间可能有色差属正常。

CSKY 中隔 | 0757-85577890
门窗设计/3D效果设计 | M:18098176921



George Group

SKYLAND 斯凯兰

整体门窗



开启空间美学与生活新篇

OPEN A NEW CHAPTER
IN SPATIAL AESTHETICS AND LIFE

经销商：

OUTSTANDING

传承经典 创想生活新空间

Inheriting classic ideas and creating
new living spaces

简至极致 · 生活之美

SIMPLICITY TO THE EXTREME

THE BEAUTY OF LIFE

大视野·无边界 给您家里一个安全 / 健康的居家生活环境

Big View · Boundless, Providing a Safe / Healthy Home Living
Environment for Your Home

产品目录

PRODUCT CATALOG



- | | | | |
|----|--|----|--|
| 01 | 星耀 110 系列推拉窗 (56 扇)
Xingyao 110 series sliding windows (56 windows) | 59 | 铝木门
aluminum-wood door |
| 05 | 135 系列推拉门 (65 扇)
135 series sliding doors (65 pieces) | 60 | 阳光房
sunroom |
| 09 | 星语 66-157 系列推拉门 (66 扇)
Star Language 66-157 series sliding doors (66 pieces) | 61 | 55 平开门
55 swing door |
| 13 | 166 重型系列推拉门 (70 扇)
166 heavy-duty series sliding doors (70 pieces) | 62 | 18 平开门
18 swing door |
| 17 | 50 非断桥平开门 / 窗
50 non broken bridge swing doors/windows | 63 | 上下提拉窗
Pull up and down the window |
| 19 | 55 断桥平开门 / 窗
55 Broken Bridge Flat Door/Window | 64 | 上下折叠窗
Up and down folding windows |
| 23 | 65 断桥平开门 / 窗
65 Broken Bridge Flat Door/Window | 65 | 微型电动升降窗
Micro electric lifting window |
| 27 | 110 断桥窗纱一体平开窗
110 bridge cut window screen integrated casement window | 66 | 智能电动升降窗
Intelligent electric lifting window |
| 31 | 110 云享断桥窗纱一体平开窗
110 Yunxiang Broken Bridge Window Screen Integrated Flat Window | 67 | 复古平开门
Retro Swing Door |
| 35 | 126 断桥侧压窗
126 Broken Bridge Side Pressure Window | 71 | 隐框幕墙
hidden frame curtain wall |
| 39 | 88 内开内倒平开窗
88 inside open, inside inverted casement window | 72 | 明框幕墙
stick curtain wall |
| 43 | 128 六轨悬浮窗 / 全景推拉窗
128 six track floating window/panoramic sliding window | 73 | 纱门 / 纱网
Screen door/mesh |
| 49 | 68 防夹手折叠门
68 anti pinch folding door | 75 | 大 / 小 PD 门
Large/Small PD Door |
| 53 | 75 重型折叠门
75 heavy-duty folding door | 77 | 护栏
guardrail |
| 57 | 极窄推拉门
ultra-narrow sliding door | 78 | 配件
accessories |


星耀 110

系列推拉窗 (56 扇)


XINGYAO 110 SERIES SLIDING WINDOWS (56 WINDOWS)

产品说明 Product description

- ◎ 铝型材采用 6063-T5 高强度 A 棒原生铝，强度高，抗裂变，韧度高。
The aluminum profile is made of 6063-T5 high-strength A-bar primary aluminum, which has high strength, fission resistance, and toughness.
- ◎ 中窄框设计，适用于较大空间，通透开阔，赋予整个空间更多的个性与时尚感。
Medium narrow frame design, suitable for larger spaces, transparent and open, giving the entire space more personality and fashion sense.
- ◎ 45°斜角拼接工艺，坚固又美观，整体设计简洁流畅。
45 ° angled splicing process, sturdy and beautiful, with a simple and smooth overall design.
- ◎ 上轨防摇摆设计，密封性能好，推拉顺畅不摇晃。
Anti sway design on the upper track, good sealing performance, smooth pushing and pulling without shaking.
- ◎ 下轨采用不锈钢轨道，耐磨防腐蚀，使用寿命长，承重能力强，不易脱轨。
The lower rail adopts stainless steel track, which is wear-resistant and corrosion-resistant, has a long service life, strong load-bearing capacity, and is not easy to derail.
- ◎ 下轨坡道排水设计，排水顺畅、无积水。
The drainage design of the downhill ramp ensures smooth drainage and no accumulation of water.
- ◎ 全密封汽车级安全玻璃，双层密封，隔音、隔热、安全性能更佳。
Fully sealed automotive grade safety glass, double-layer sealing, better sound insulation, heat insulation, and safety performance.
- ◎ 304 不锈钢高清网 / 金钢网，不易生锈、耐腐蚀、采光性能突出，防虫更加有效。
304 stainless steel high-definition mesh/steel mesh, not easy to rust, corrosion-resistant, outstanding lighting performance, and more effective insect prevention.
- ◎ 搭配时下流行的颜色，低调朴素，更显休闲舒适。
Paired with trendy colors, it is low-key and simple, making it more casual and comfortable.

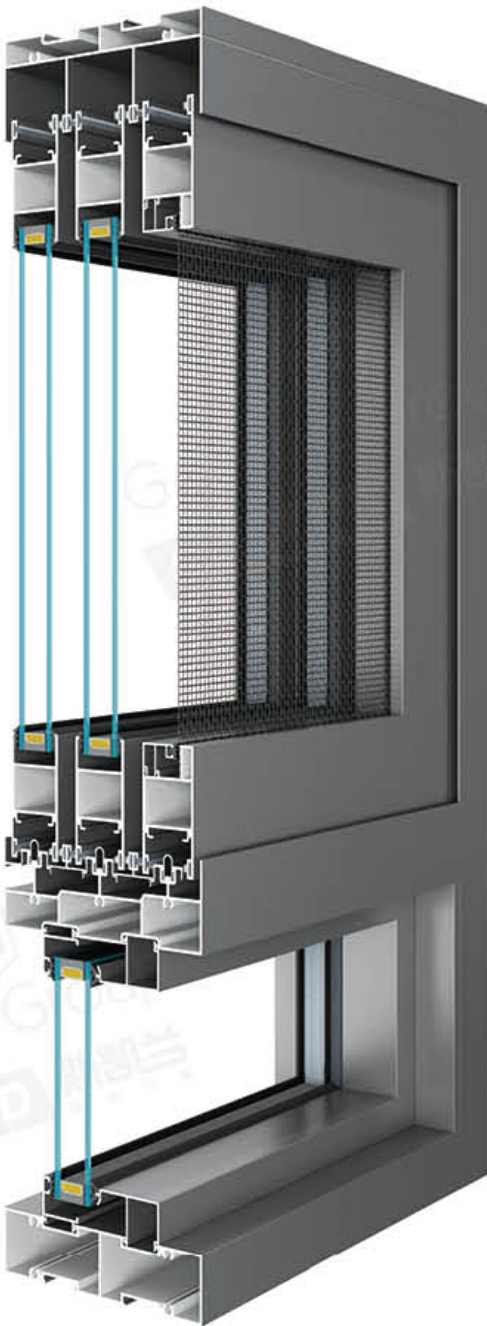

开启方式 Opening method


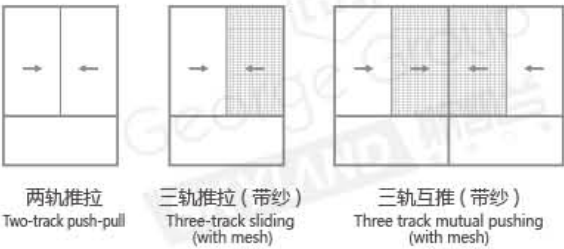


性能参数 Performance parameters


水密性能 /Water tightness performance	$\Delta p \geq 700$	6 级
气密性能 /Air tightness performance	$q1 \leq 0.5$	7 级
抗风压性能 /Wind resistance performance	$p3 \geq 5.0$	8 级
隔热性能 /Thermal insulation performance	$2.0 > k \geq 1.6$	5 级
隔音性能 /Sound insulation performance	$40 \leq Rw + C_{tr} < 45$	4 级

配置参数 Configuration parameters

型材壁厚: 1.4 Profile wall thickness: 1.4	占墙宽度: 110 Wall occupancy width: 110
型材纵深: 框 110/ 玻扇 27/ 纱扇 27 Profile depth: frame 110 / glass panel 27 screen panel 27	可视面: 框 45/ 玻扇 56/ 纱扇 56 Visible surface: frame 45 / glass sash 56 screen panel 56
玻璃配置: 5+12A+5 Glass configuration: 5 + 12A + 5	五金系列: 品牌五金 Hardware Series: Brand Hardware

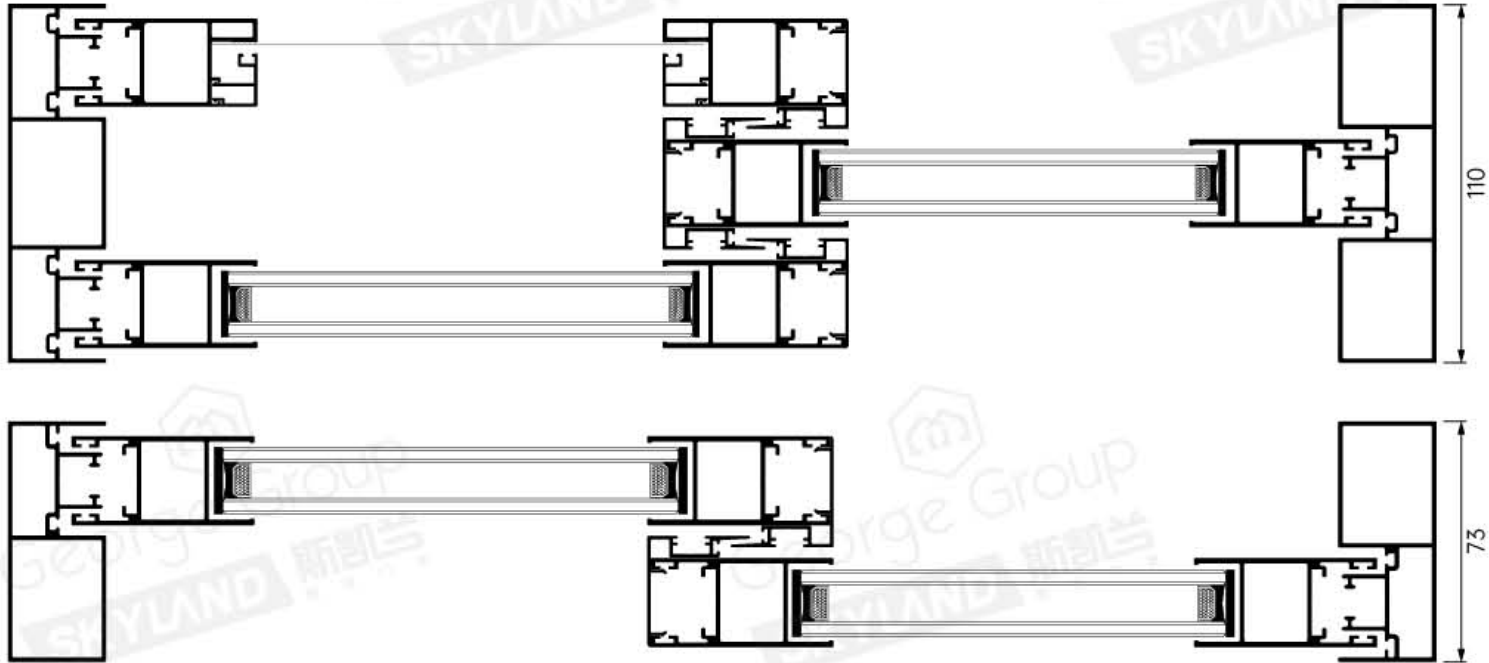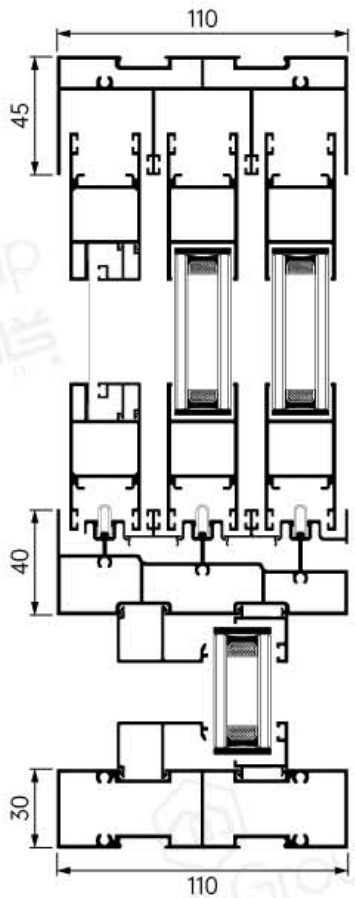

五金配件 Hardware accessories

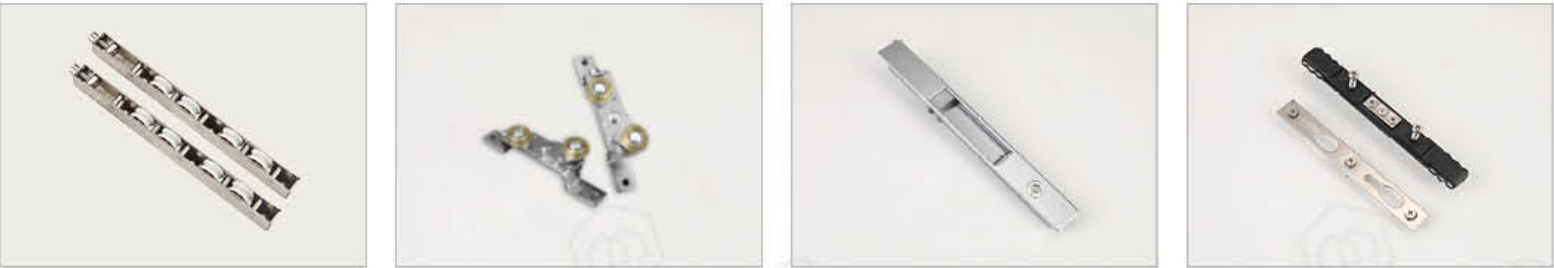

产品颜色 Product color





YH-26001


135

系列推拉门 (65 扇)


SERIES OF SLIDING DOORS (65 PANELS)

产品说明 Product description

- ◎ 铝型材采用 6063-T5 高强度 A 棒原生铝，强度高，抗裂变，韧度高。
The aluminum profile is made of 6063-T5 high-strength A-bar primary aluminum, which has high strength, fission resistance, and toughness.
- ◎ 中窄框设计，适用于较大空间，通透开阔，赋予整个空间更多的个性与时尚感。
Medium narrow frame design, suitable for larger spaces, transparent and open, giving the entire space more personality and fashion sense.
- ◎ 45°斜角拼接工艺，坚固又美观，整体设计简洁流畅。
45° angled splicing process, sturdy and beautiful, with a simple and smooth overall design.
- ◎ 上轨防摇摆设计，密封性能好，推拉顺畅不摇晃。
Anti sway design on the upper track, good sealing performance, smooth pushing and pulling without shaking.
- ◎ 下轨采用不锈钢轨道，耐磨防腐蚀，使用寿命长，承重能力强，不易脱轨。
The lower rail adopts stainless steel track, which is wear-resistant and corrosion-resistant, has a long service life, strong load-bearing capacity, and is not easy to derail.
- ◎ 下轨坡道排水设计，排水顺畅、无积水。
The drainage design of the downhill ramp ensures smooth drainage and no accumulation of water.
- ◎ 全密封汽车级安全玻璃，双层密封，隔音、隔热、安全性能更佳。
Fully sealed automotive grade safety glass, double-layer sealing, better sound insulation, heat insulation, and safety performance.
- ◎ 304 不锈钢高清网 / 金钢网，不易生锈、耐腐蚀、采光性能突出，防虫更加有效。
304 stainless steel high-definition mesh/steel mesh, not easy to rust, corrosion-resistant, outstanding lighting performance, and more effective insect prevention.
- ◎ 搭配时下流行的颜色，低调朴素，更显休闲舒适。
Paired with trendy colors, it is low-key and simple, making it more casual and comfortable.

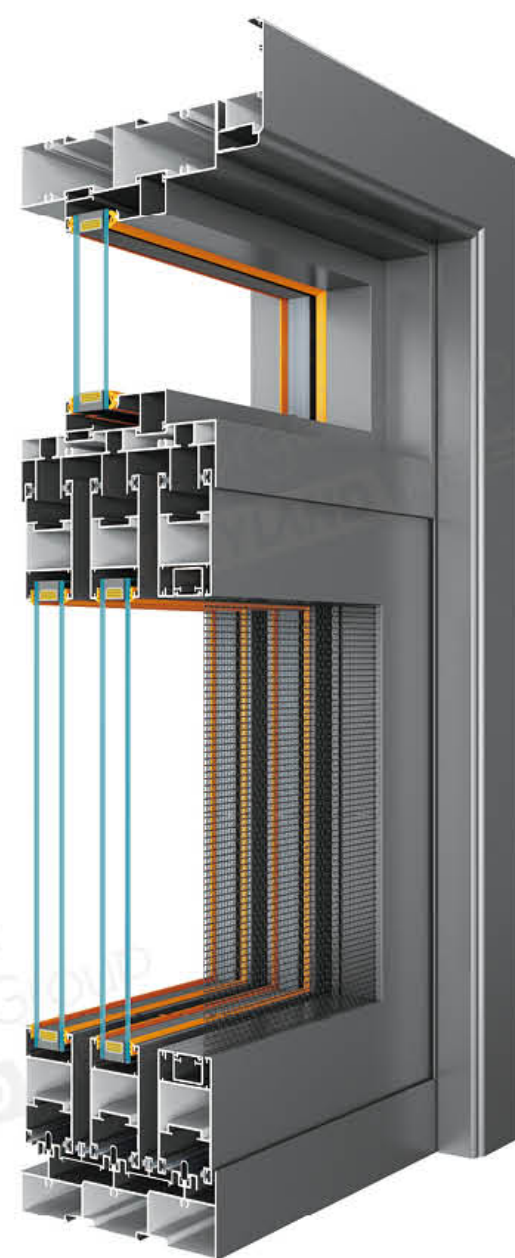

开启方式 Opening method

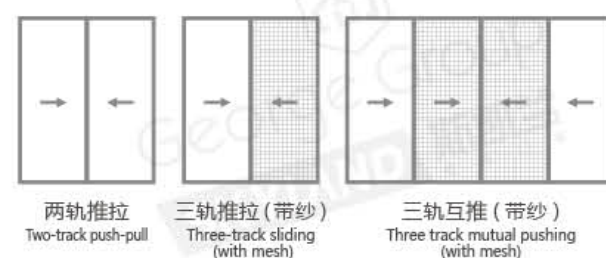

配置参数 Configuration parameters

型材壁厚: 1.6

Profile wall thickness: 1.6

占墙宽度: 135

Wall occupancy width: 135

型材纵深: 框 135/ 玻扇 35/ 纱扇 35

Profile depth: frame 135 / glass panel 35 / screen panel 35

可视面: 框 35/ 玻扇 65/ 纱扇 65

Visible surface: frame 35 / glass sash 65 / screen sash 65


玻璃配置: 5+15A+5

Glass configuration: 5 + 15A + 5


五金系列: 品牌五金

Hardware Series: Brand Hardware

可选光企 optional guangqi








35X65-1.6mm



35X65-2.5mm



35X65-4.0mm

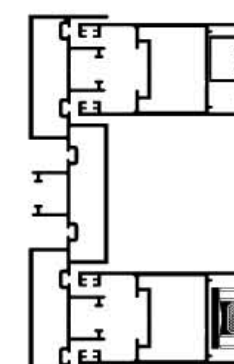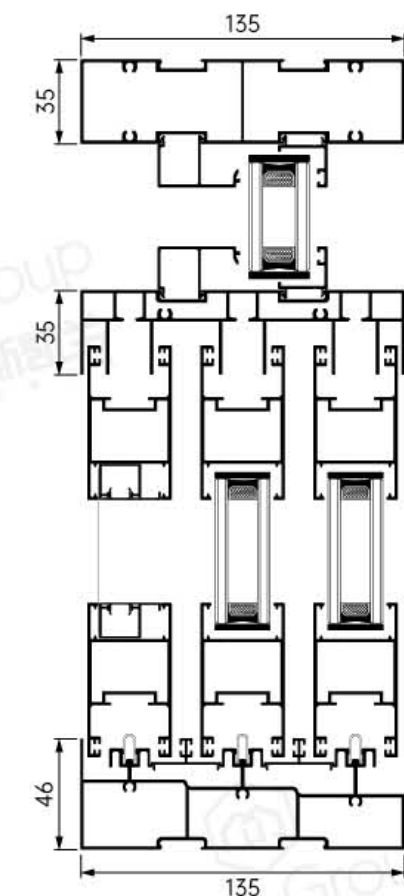

五金配件 Hardware accessories



产品颜色 Product color



氟碳灰 / fluorocarbon gray



星巴咖啡 / starbucks coffee



黑色 / black



黑金石 / black gold stone



YH-26002


高低轨排水设计

排水顺畅，舒适安心

INVISIBLE SEALING RING

高轨靠近室内，低轨在室外一边，更利于疏导雨水排往室外，防止雨水在轨道中淤积而导致内灌或渗水。

The high rail is close to the indoor area, while the low rail is on the outdoor side, which is more conducive to diverting rainwater to the outside and preventing rainwater from accumulating in the rail and causing internal flooding or seepage.

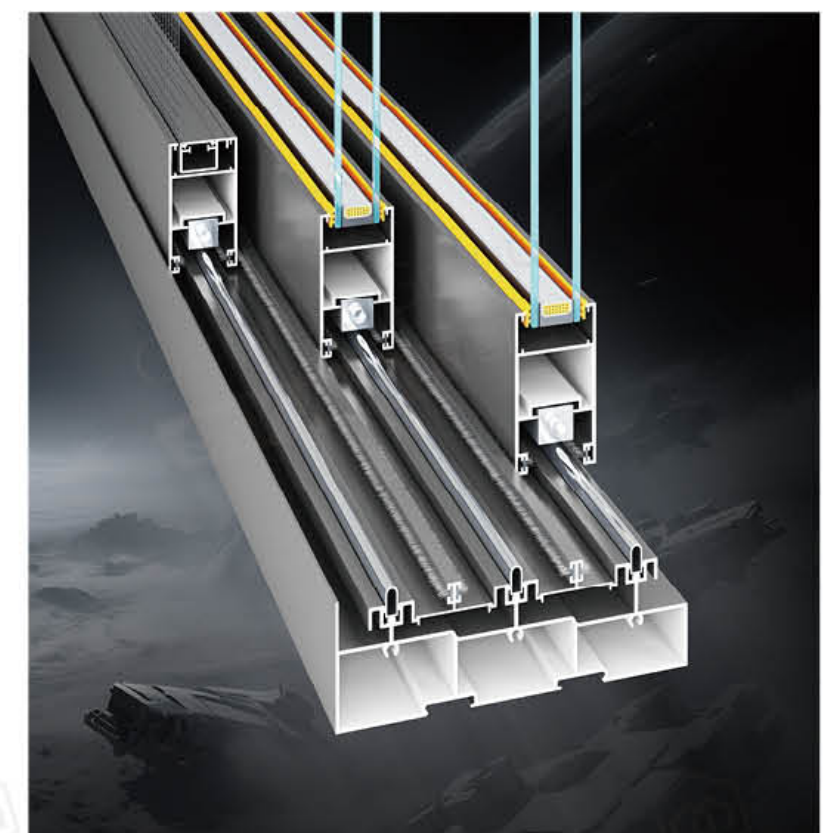


星语 66

157 系列推拉门 (66 扇)


STAR LANGUAGE 66-157 SERIES SLIDING DOORS (66 PIECES)

产品说明 Product description

- ◎ 铝型材采用 6063-T5 高强度 A 棒原生铝，强度高，抗裂变，韧度高。
The aluminum profile is made of 6063-T5 high-strength A-bar primary aluminum, which has high strength, fission resistance, and toughness.
- ◎ 中窄框设计，适用于较大空间，通透开阔，赋予整个空间更多的个性与时尚感。
Medium narrow frame design, suitable for larger spaces, transparent and open, giving the entire space more personality and fashion sense.
- ◎ 45°斜角拼接工艺，坚固又美观，整体设计简洁流畅。
45° angled splicing process, sturdy and beautiful, with a simple and smooth overall design.
- ◎ 上轨防摇摆设计，密封性能好，推拉顺畅不摇晃。
Anti sway design on the upper track, good sealing performance, smooth pushing and pulling without shaking.
- ◎ 下轨采用不锈钢轨道，耐磨防腐，使用寿命长，承重能力强，不易脱轨。
The lower rail adopts stainless steel track, which is wear-resistant and corrosion-resistant, has a long service life, strong load-bearing capacity, and is not easy to derail.
- ◎ 下轨坡道排水设计，排水顺畅、无积水。
The drainage design of the downhill ramp ensures smooth drainage and no accumulation of water.
- ◎ 全密封汽车级安全玻璃，双层密封，隔音、隔热、安全性能更佳。
Fully sealed automotive grade safety glass, double-layer sealing, better sound insulation, heat insulation, and safety performance.
- ◎ 304 不锈钢高清网 / 金钢网，不易生锈、耐腐蚀、采光性能突出，防虫更加有效。
304 stainless steel high-definition mesh/steel mesh, not easy to rust, corrosion-resistant, outstanding lighting performance, and more effective insect prevention.
- ◎ 搭配时下流行的颜色，低调朴素，更显休闲舒适。
Paired with trendy colors, it is low-key and simple, making it more casual and comfortable.

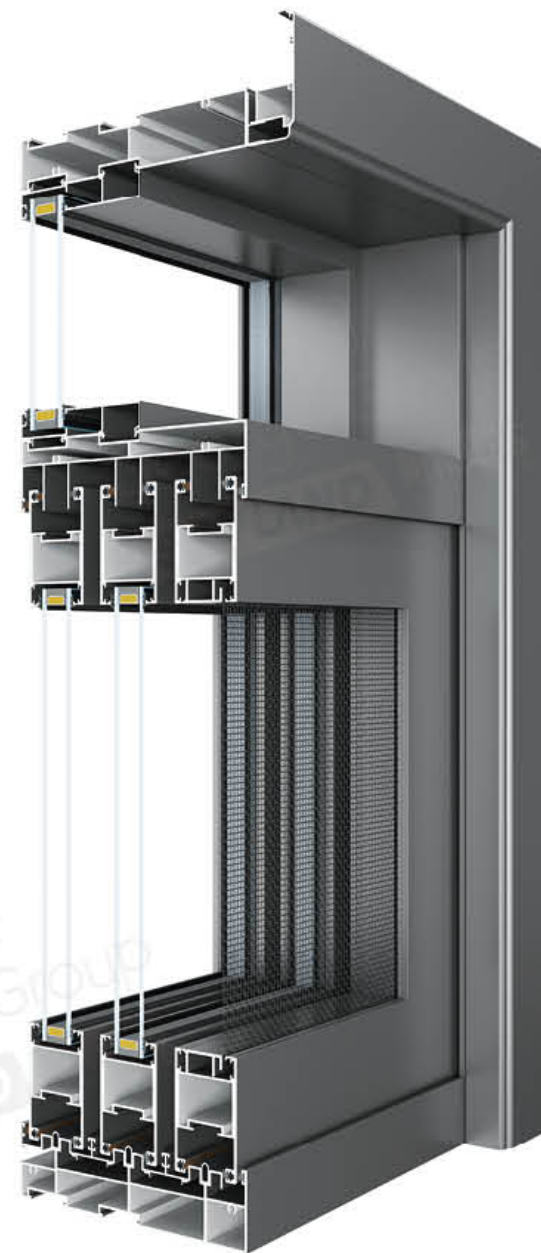

开启方式 Opening method

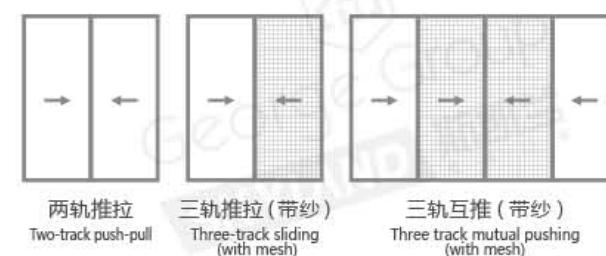

配置参数 Configuration parameters

型材壁厚: 1.8

Profile wall thickness: 1.8

占墙宽度: 157

Wall occupancy width: 157

型材纵深: 框 157 / 玻扇 40 / 纱扇 40

Profile depth: frame 157 / glass panel 40 / screen panel 40

可视面: 框 40 / 玻扇 66 / 纱扇 66

Visible surface: frame 40 / glass sash 66 / screen sash 66


玻璃配置: 5+15A+5

Glass configuration: 5 + 15A + 5


五金系列: 品牌五金

Hardware Series: Brand Hardware


可选光企 optional guangqi





40X66-1.4mm



40X66-2.0mm



40X66-3.0mm

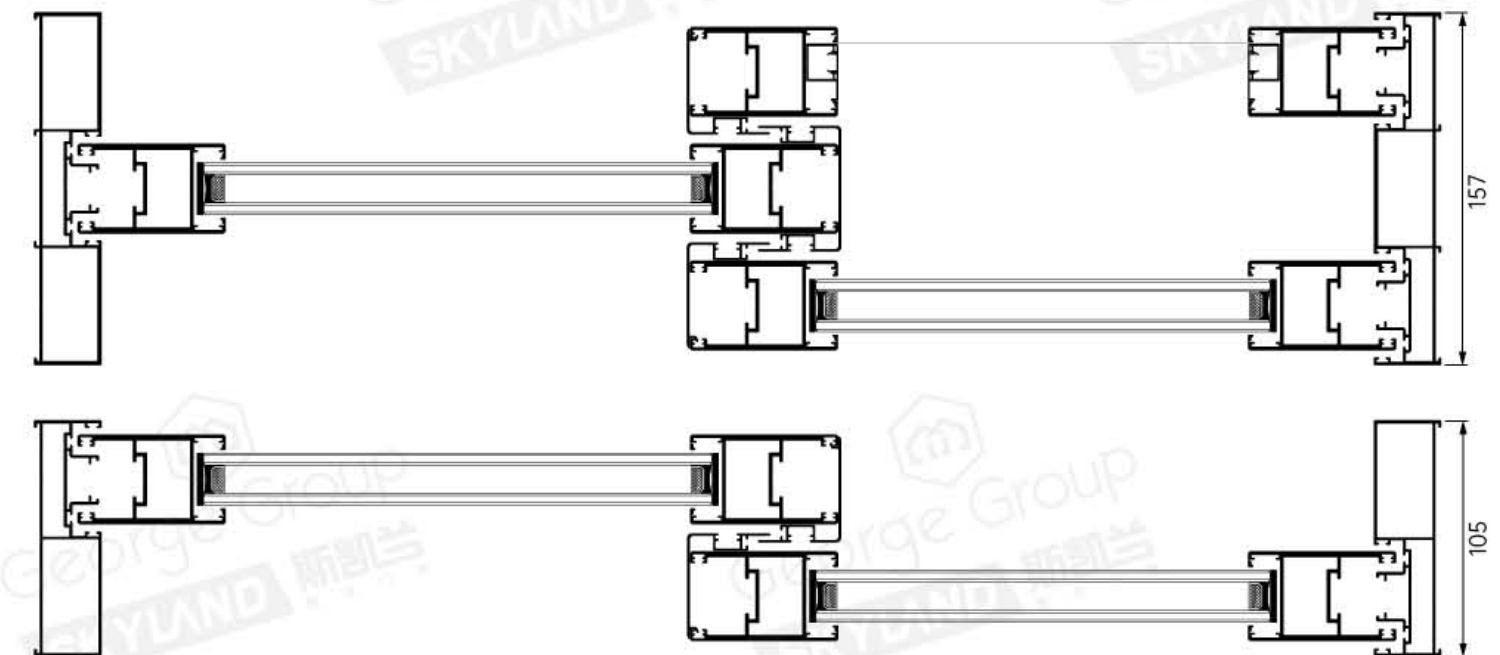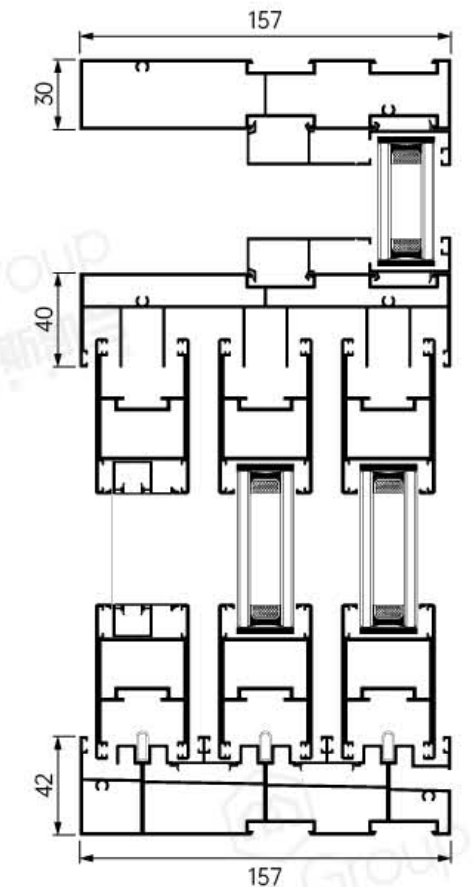

五金配件 Hardware accessories



产品颜色 Product color




氟碳灰 / fluorocarbon gray



星巴咖啡 / starbucks coffee



黑色 / black



黑金石 / black gold stone

通过现代化家居生活的感悟，
诠释对家居智慧的沉淀从多个维度对产品进行考量雕琢，
不断提高与升级生产技术，打造高质量的生活居所。

Through the insights of modern home living, we interpret the accumulation of home intelligence by considering and refining products from multiple dimensions, continuously improving and upgrading production technology, and creating high-quality living spaces.



YH-26003

“门窗”
让生活更有品质

DOORS AND WINDOWS
MAKE LIFE MORE QUALITY




YH-26004

166 重型 系列推拉门 (70 扇)


166 HEAVY-DUTY SERIES SLIDING DOORS (70 PIECES)

产品说明 Product description

- ◎ 铝型材采用 6063-T5 高强度 A 棒原生铝，强度高，抗裂变，韧度高。
The aluminum profile is made of 6063-T5 high-strength A-bar primary aluminum, which has high strength, fission resistance, and toughness.
- ◎ 中窄框设计，适用于较大空间，通透开阔，赋予整个空间更多的个性与时尚感。
Medium narrow frame design, suitable for larger spaces, transparent and open, giving the entire space more personality and fashion sense.
- ◎ 45°斜角拼接工艺，坚固又美观，整体设计简洁流畅。
45° angled splicing process, sturdy and beautiful, with a simple and smooth overall design.
- ◎ 上轨防摇摆设计，密封性能好，推拉顺畅不摇晃。
Anti sway design on the upper track, good sealing performance, smooth pushing and pulling without shaking.
- ◎ 下轨采用不锈钢轨道，耐磨防腐蚀，使用寿命长，承重能力强，不易脱轨。
The lower rail adopts stainless steel track, which is wear-resistant and corrosion-resistant, has a long service life, strong load-bearing capacity, and is not easy to derail.
- ◎ 下轨坡道排水设计，排水顺畅、无积水。
The drainage design of the downhill ramp ensures smooth drainage and no accumulation of water.
- ◎ 全密封汽车级安全玻璃，双层密封，隔音、隔热、安全性能更佳。
Fully sealed automotive grade safety glass, double-layer sealing, better sound insulation, heat insulation, and safety performance.
- ◎ 304 不锈钢高清网 / 金钢网，不易生锈、耐腐蚀、采光性能突出，防虫更加有效。
304 stainless steel high-definition mesh/steel mesh, not easy to rust, corrosion-resistant, outstanding lighting performance, and more effective insect prevention.
- ◎ 搭配时下流行的颜色，低调朴素，更显休闲舒适。
Paired with trendy colors, it is low-key and simple, making it more casual and comfortable.

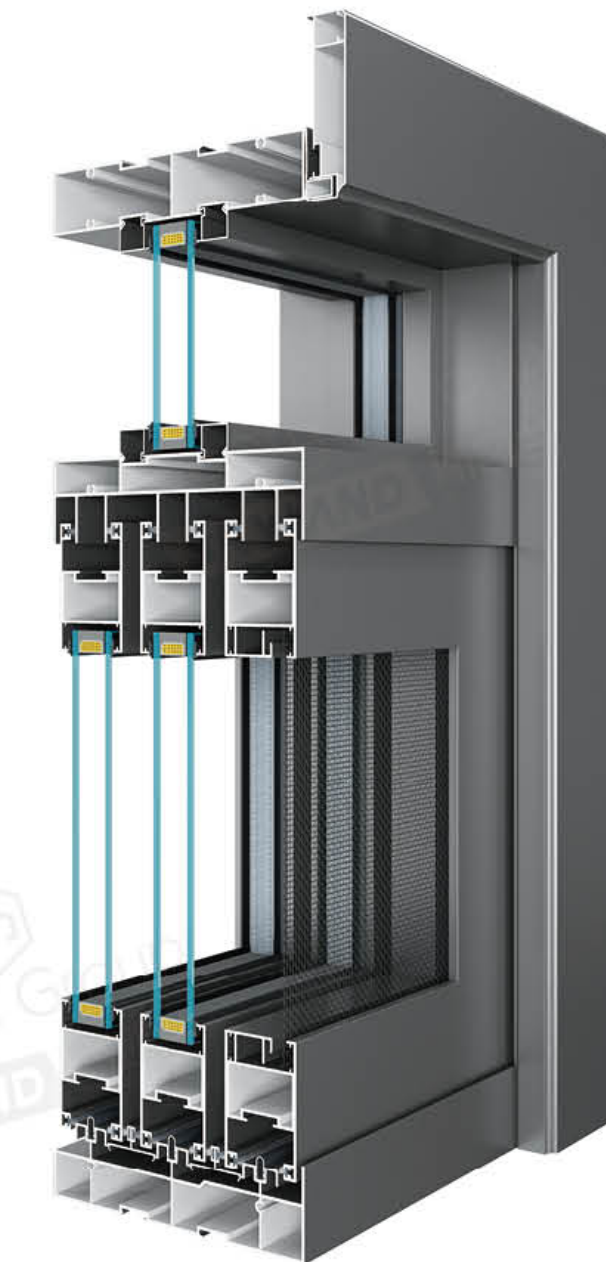

开启方式 Opening method

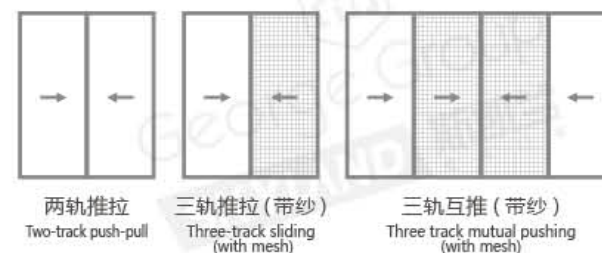


性能参数 Performance parameters

水密性能 / Water tightness performance	$\Delta p \geq 700$	6 级
气密性能 / Air tightness performance	$q_1 \leq 0.5$	7 级
抗风压性能 / Wind resistance performance	$p_3 \geq 5.0$	9 级
隔热性能 / Thermal insulation performance	$2.0 > k \geq 1.6$	5 级
隔音性能 / Sound insulation performance	$40 \leq R_w + C_{tr} < 45$	6 级

配置参数 Configuration parameters

型材壁厚: 2.0 Profile wall thickness: 2.0	占墙宽度: 166 Wall occupancy width: 166
型材纵深: 框 166 / 玻扇 45 / 纱扇 45 Profile depth: frame 166 / glass panel 45 / screen panel 45	可视面: 框 45 / 玻扇 70 / 纱扇 70 Visible surface: frame 45 / glass sash 70 / screen sash 70
玻璃配置: 5+20A+5 Glass configuration: 5 + 20A + 5	五金系列: 品牌五金 Hardware Series: Brand Hardware

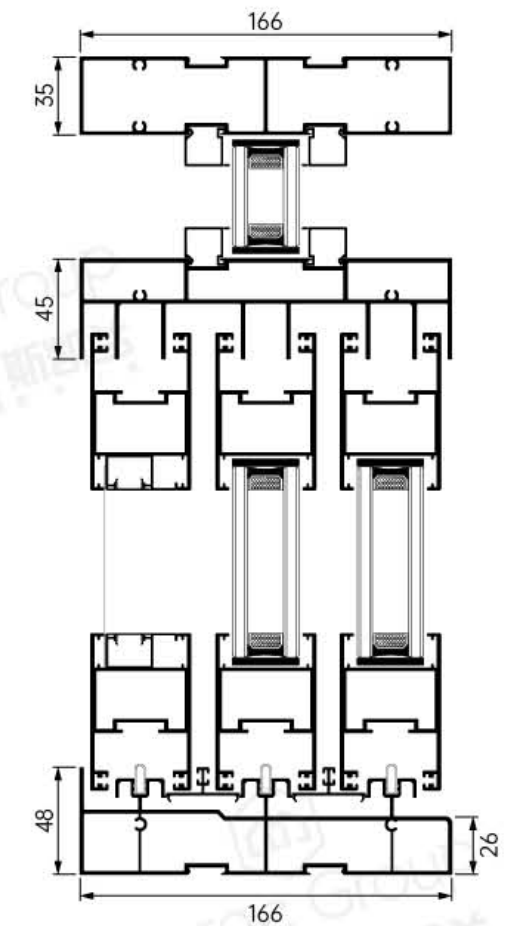

五金配件 Hardware accessories



产品颜色 Product color





YH-26005

守护舒适家园 隔绝风雨侵袭

GUARDING A COMFORTABLE HOME
ISOLATE FROM WIND AND RAIN INVASION

精选高品质型材，搭配密封结构与防撬升级锁具，
不仅能抵御台风、暴雨等极端天气，更能隔绝外界偷盗风险，
给家人十足的安全感。

Selected high-quality profiles, together with sealing structure and anti prying
upgraded locks, can not only withstand extreme weather such as typhoon and
rainstorm, but also isolate the risk of theft from the outside world, giving the
family a full sense of security.



YH-26006

50

非断桥平开门 / 窗

50 NON BROKEN BRIDGE SWING DOOR/WINDOW

产品说明 Product description

- ◎ 铝型材采用 6063-T5 高强度 A 棒原生铝，强度高，抗裂变，韧度高。
The aluminum profile is made of 6063-T5 high-strength A-bar primary aluminum, which has high strength, fission resistance, and toughness.
- ◎ 压线采用方压线设计，线条巧妙拼接，力学卡位，拆装方便。
The pressure line adopts a square pressure line design, with cleverly spliced lines, mechanical locking, and easy disassembly and assembly.
- ◎ 台玻（信义）原片 5+9A+5，一体折弯中空铝条。
Taiwan Glass (Xinyi) original sheet 5+9A+5, integrated bent hollow aluminum strip.
- ◎ 外平内开设计，整体线条流畅，美观大方。
The design is flat on the outside and open on the inside, with smooth and elegant overall lines.
- ◎ 地漏排水设计，排水顺畅、易清理。
Floor drain design ensures smooth drainage and easy cleaning.



开启方式 Opening method



内平开
Internally open




内开内倒
Open inward and tilt inward

性能参数 Performance parameters

水密性能 / Water tightness performance	$\Delta p \geq 700$	5 级
气密性能 / Air tightness performance	$q_1 \leq 0.5$	4 级
抗风压性能 / Wind resistance performance	$p_3 \geq 5.0$	7 级
隔热性能 / Thermal insulation performance	$2.0 > k \geq 1.6$	4 级
隔音性能 / Sound insulation performance	$40 \leq R_w + C_{tr} < 45$	3 级

配置参数 Configuration parameters


型材壁厚: 1.4 Profile wall thickness: 1.4	占墙宽度: 50 Wall occupancy width: 50
型材纵深: 框 50 / 玻扇 50 Profile depth: frame 50 / glass panel 50	可视面: 框 32 / 玻扇 68.8 Visible surface: frame 32 / glass sash 68.8
玻璃配置: 5+9A+5 Glass configuration: 5 + 9A + 5	五金系列: 品牌五金 Hardware Series: Brand Hardware
开启扇适用: 宽度 700mm 内 / 高度 1500mm 内 Sliding sash suitable for: width within 700mm / height within 1500mm	

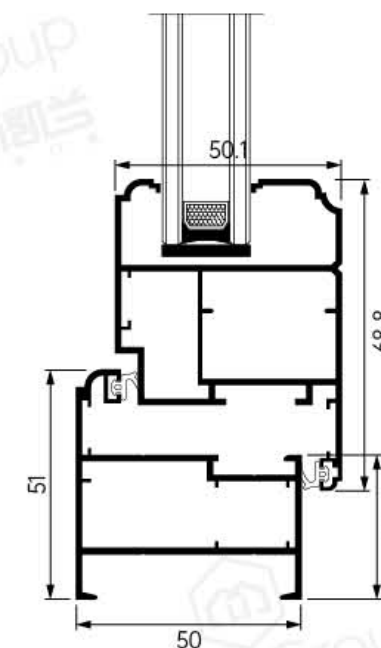

五金配件 Hardware accessories



产品颜色 Product color

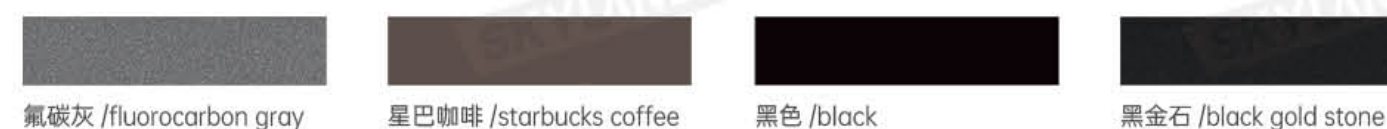


55

断桥平开门 / 窗


55 BROKEN BRIDGE FLAT DOOR/WINDOW

产品说明 Product description

- ◎ 铝型材采用 6063-T5 高强度 A 棒原生铝，强度高，抗裂变，韧度高。
The aluminum profile is made of 6063-T5 high-strength A-bar primary aluminum, which has high strength, fission resistance, and toughness.
- ◎ PA66 多腔体尼龙隔热条，具有减低热传导、保温节能、降低噪音等优点。
PA66 multi cavity nylon insulation strip has the advantages of reducing thermal conductivity, insulation, energy saving, and noise reduction.
- ◎ 压线采用方压线设计，线条巧妙拼接，力学卡位，拆装方便。
The pressure line adopts a square pressure line design, with cleverly spliced lines, mechanical locking, and easy disassembly and assembly.
- ◎ 台玻（信义）原片 5+9A+5，一体折弯中空铝条。
Taiwan Glass (Xinyi) original sheet 5+9A+5, integrated bent hollow aluminum strip.
- ◎ 外平内开设计，整体线条流畅，美观大方。
The design is flat on the outside and open on the inside, with smooth and elegant overall lines.
- ◎ 地漏排水设计，排水顺畅、易清理。
Floor drain design ensures smooth drainage and easy cleaning.

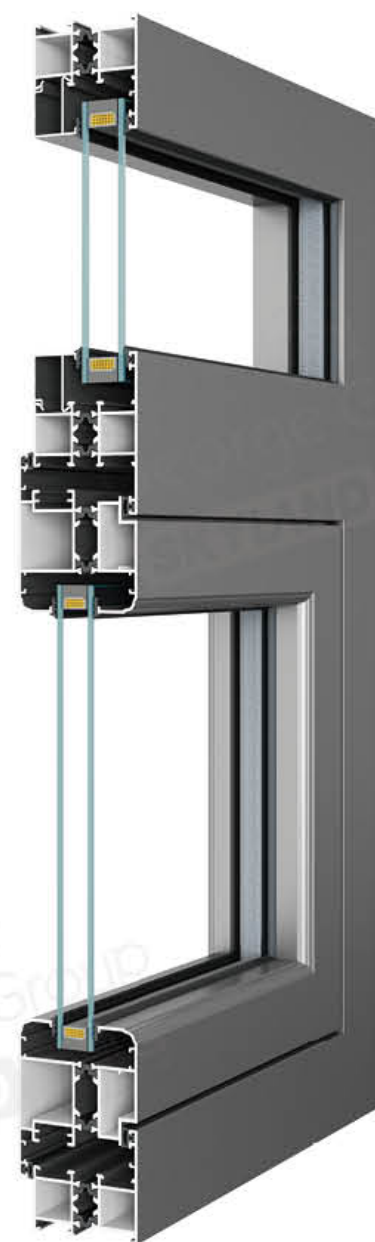

开启方式 Opening method


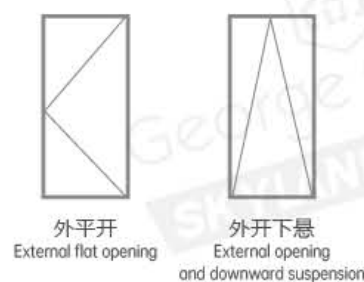


性能参数 Performance parameters

水密性能 / Water tightness performance	$\Delta p \geq 700$	5 级
气密性能 / Air tightness performance	$q1 \leq 0.5$	4 级
抗风压性能 / Wind resistance performance	$p3 \geq 5.0$	7 级
隔热性能 / Thermal insulation performance	$2.0 > k \geq 1.6$	4 级
隔音性能 / Sound insulation performance	$40 \leq Rw + C_{tr} < 45$	3 级

配置参数 Configuration parameters

型材壁厚: 1.4 Profile wall thickness: 1.4	占墙宽度: 55 Wall occupancy width: 55
型材纵深: 框 55 / 玻扇 63 Profile depth: frame 55 / glass panel 63	可视面: 框 30 / 玻扇 75 Visible surface: frame 30 / glass sash 75
玻璃配置: 5+9A+5 Glass configuration: 5 + 9A + 5	五金系列: 品牌五金 Hardware Series: Brand Hardware
开启扇适用: 宽度 700mm 内 / 高度 1500mm 内 Sliding sash suitable for: width within 700mm / height within 1500mm	

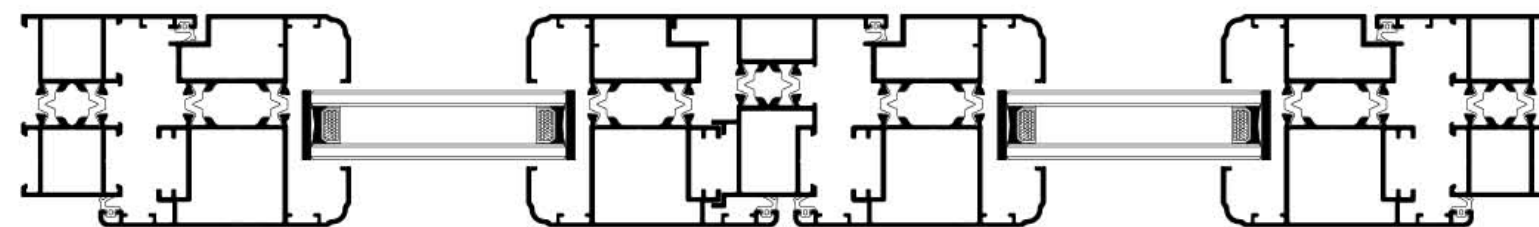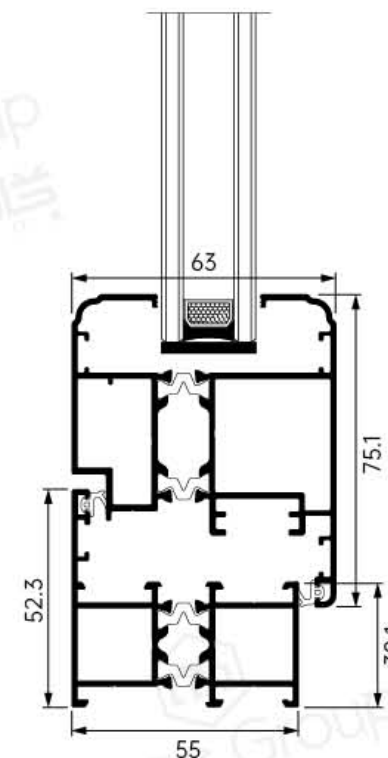

五金配件 Hardware accessories



产品颜色 Product color



用专业的力量
优化您的生活

USING PROFESSIONAL STRENGTH
OPTIMIZE YOUR LIFE



YH-26008



YH-26009


65

断桥平开门 / 窗


65 BROKEN BRIDGE SWING DOOR/WINDOW

产品说明 Product description

- ◎ 铝型材采用 6063-T5 高强度 A 棒原生铝，强度高，抗裂变，韧度高。
The aluminum profile is made of 6063-T5 high-strength A-bar primary aluminum, which has high strength, fission resistance, and toughness.
- ◎ PA66 多腔体尼龙隔热条，具有减低热传导、保温节能、降低噪音等优点。
PA66 multi cavity nylon insulation strip has the advantages of reducing thermal conductivity, insulation, energy saving, and noise reduction.
- ◎ 压线采用方压线设计，线条巧妙拼接，力学卡位，拆装方便。
The pressure line adopts a square pressure line design, with cleverly spliced lines, mechanical locking, and easy disassembly and assembly.
- ◎ 台玻（信义）原片 5+20A+5，一体折弯中空铝条。
Taiwan Glass (Xinyi) original sheet 5+20A+5, integrated bent hollow aluminum strip.
- ◎ 外平内开设计，整体线条流畅，美观大方。
The design is flat on the outside and open on the inside, with smooth and elegant overall lines.
- ◎ 地漏排水设计，排水顺畅、易清理。
Floor drain design ensures smooth drainage and easy cleaning.

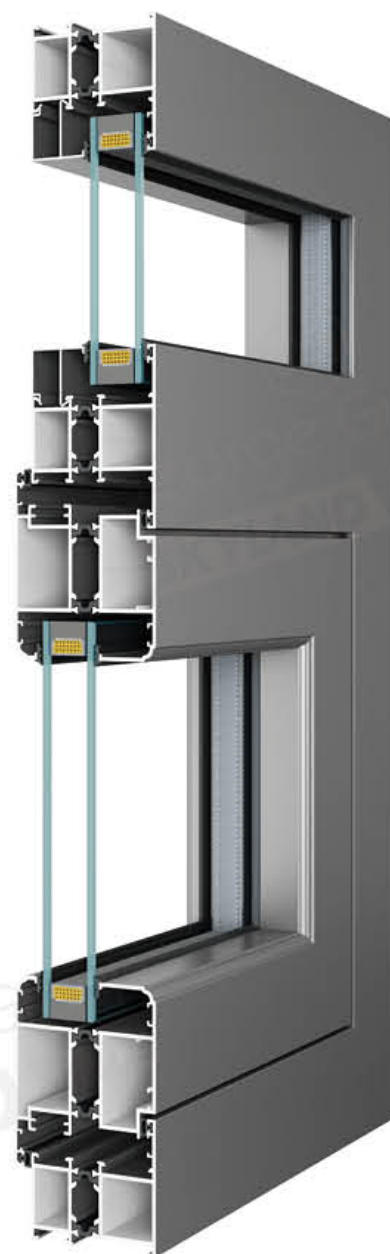

开启方式 Opening method


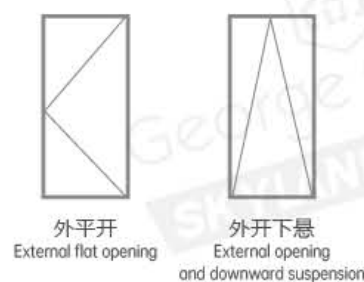


性能参数 Performance parameters

水密性能 / Water tightness performance	$\Delta p \geq 700$	6 级
气密性能 / Air tightness performance	$q_1 \leq 0.5$	5 级
抗风压性能 / Wind resistance performance	$p_3 \geq 5.0$	8 级
隔热性能 / Thermal insulation performance	$2.0 > k \geq 1.6$	5 级
隔音性能 / Sound insulation performance	$40 \leq R_w + C_{tr} < 45$	4 级

配置参数 Configuration parameters

型材壁厚: 1.8 Profile wall thickness: 1.8	占墙宽度: 65.5 Wall occupancy width: 65.5
型材纵深: 框 65.5 / 玻扇 74.5 Profile depth: frame 65.5 / glass panel 74.5	可视面: 框 40 / 玻扇 88.5 Visible surface: frame 40 / glass sash 88.5
玻璃配置: 5+20A+5 Glass configuration: 5 + 20A + 5	五金系列: 品牌五金 Hardware Series: Brand Hardware
开启扇适用: 宽度 700mm 内 / 高度 1500mm 内 Sliding sash suitable for: width within 700mm / height within 1500mm	

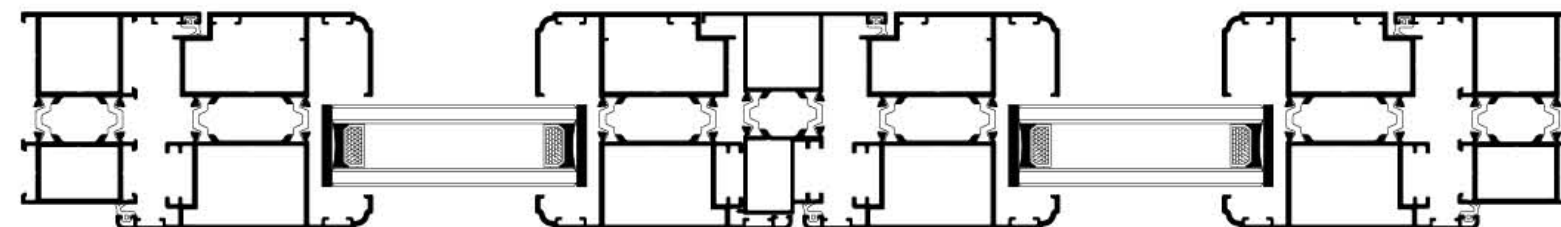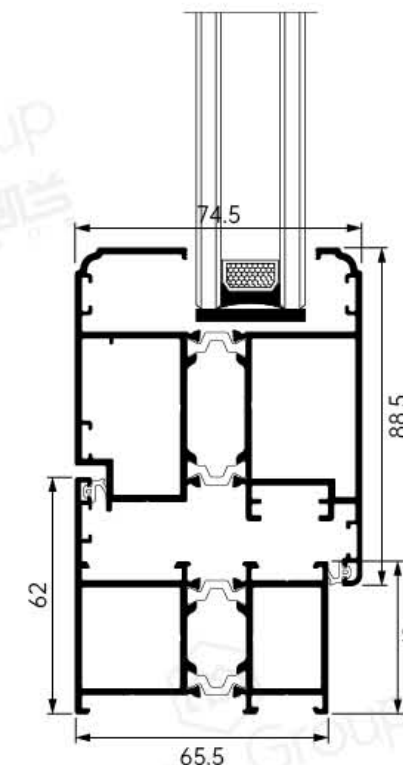

五金配件 Hardware accessories



产品颜色 Product color






|舒|适|生|活| COMFORTABLE LIFE

定制专属格调，适配各种装修风格，
让每扇门窗都契合你的审美。

Customize exclusive style, adapt to various decoration styles,
and make every door and window fit your aesthetic.

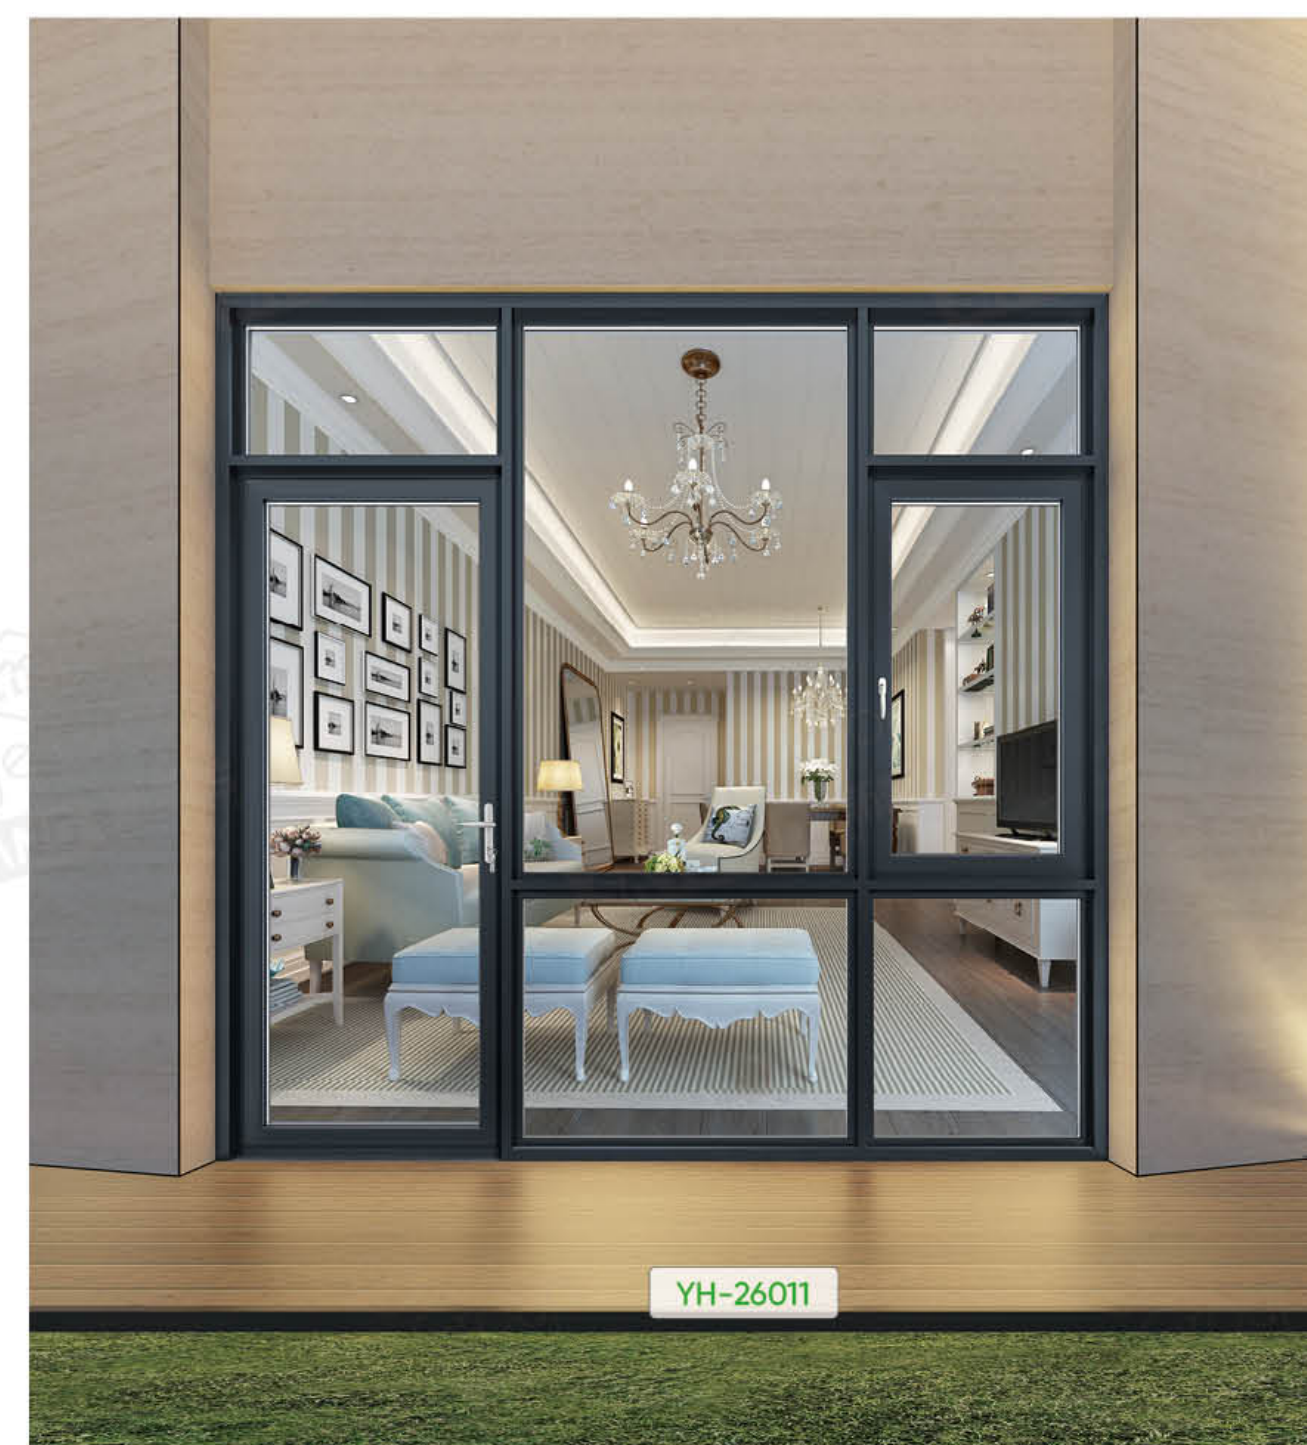


110

断桥窗纱一体平开窗


110 BRIDGE CUT WINDOW SCREEN INTEGRATED CASEMENT WINDOW

产品说明 Product description

- ◎ 铝型材采用 6063-T5 高强度 A 棒原生铝，强度高，抗裂变，韧度高。
Aluminum Profile: 6063-T5 high-strength A-grade primary aluminum, with high strength, resistance to cracking, and high toughness.
- ◎ 腔体结构 5 腔体，有效达到多层隔音，阻隔热量，增加窗户抗压能力。
5-Chamber Structure: Provides multi-layer sound insulation, heat resistance, and enhanced wind pressure resistance.
- ◎ PA66 多腔体尼龙隔热条，具有减低热传导保温节能、降低噪音等优点。
PA66 Multi-Chamber Nylon Thermal Break: Reduces thermal conduction, improves energy efficiency, and lowers noise.
- ◎ 台玻（信义）原片 5+20A+5，一体折弯中空铝条。
Glass: TAIWAN Glass (Xinyi) 5+20A+5 laminated glass with integrated bent aluminum spacer.
- ◎ 垂直多腔体等温线设计，形成一道有效的冷热条屏障，降低门窗整体耗能。
Vertical Multi-Chamber Isothermal Design: Creates an effective thermal barrier, reducing overall energy consumption.
- ◎ 304 不锈钢高清网、金钢网，不易生锈、耐腐蚀、采光性能突出，防虫更加有效。
304 Stainless Steel High-Density Mesh/Diamond Mesh: Rust-resistant, corrosion-resistant, with excellent light transmission and effective insect prevention.
- ◎ 胶条采用汽车级三元乙丙胶条，抗老化，提高密封、水密等级。
Seal: Automotive-grade EPDM rubber seal, resistant to aging, with enhanced air and water tightness.
- ◎ 隐藏排水设计，优点排水快、易清理。
Concealed Drainage System: Features fast drainage and easy cleaning.
- ◎ 压线采用幕墙小方压线，不易积灰，可视范围更宽阔，有效增加抗风压指数。
Pressure Line: Curtain wall-style small square pressure line, reducing dust accumulation, offering a wider field of view, and improving wind pressure resistance.

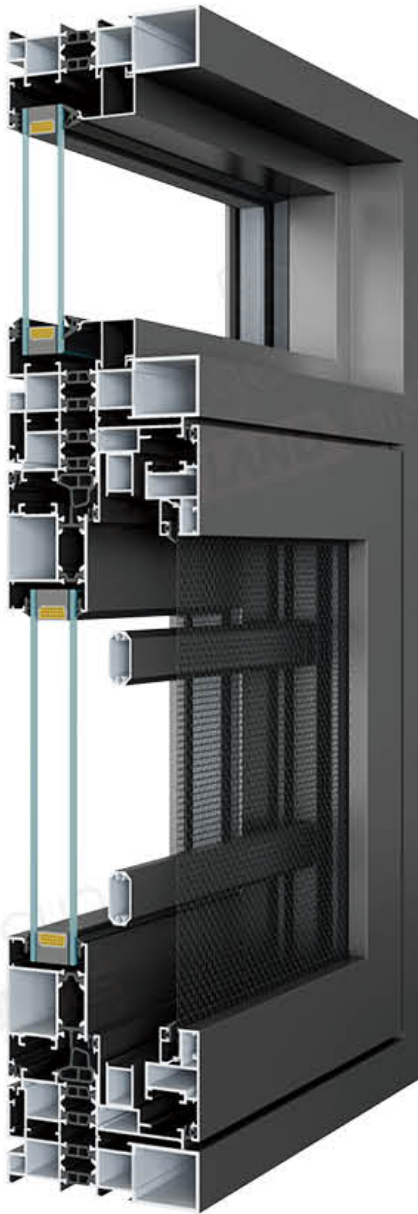

开启方式 Opening method


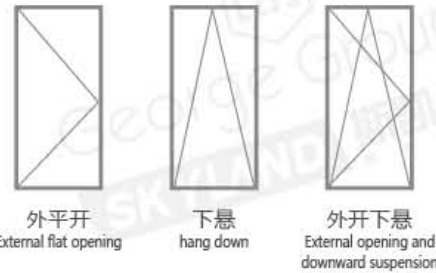


性能参数 Performance parameters

水密性能 /Water tightness performance	$\Delta p \geq 700$	7 级
气密性能 /Air tightness performance	$q1 \leq 0.5$	8 级
抗风压性能 /Wind resistance performance	$p3 \geq 5.0$	9 级
隔热性能 /Thermal insulation performance	$2.0 > k \geq 1.6$	6 级
隔音性能 /Sound insulation performance	$40 \leq Rw + Ctr < 45$	6 级

配置参数 Configuration parameters

型材壁厚: 2.0 Profile wall thickness: 2.0	占墙宽度: 110 Wall occupancy width: 110
型材纵深: 框 110/ 玻扇 47.2/ 纱扇 30 Profile depth: frame 110 / glass panel 47.2 / screen panel 30	可视面: 框 30/ 玻扇 72/ 纱扇 54 Visible surface: frame 30 / glass sash 72 / screen sash 54
玻璃配置: 5+20A+5 Glass configuration: 5 + 20A + 5	五金系列: 品牌五金 Hardware Series: Brand Hardware
开启扇适用: 宽度 700mm 内 / 高度 1500mm 内 Sliding sash suitable for: width within 700mm / height within 1500mm	

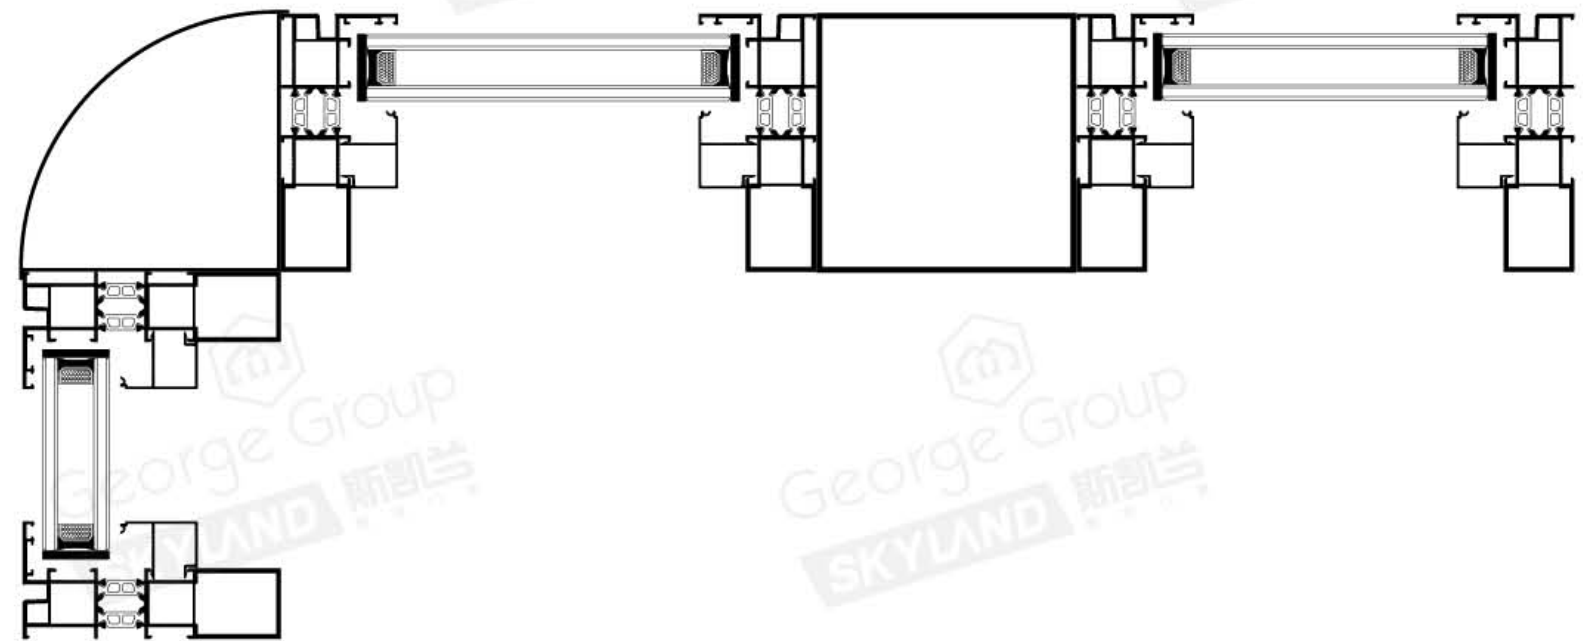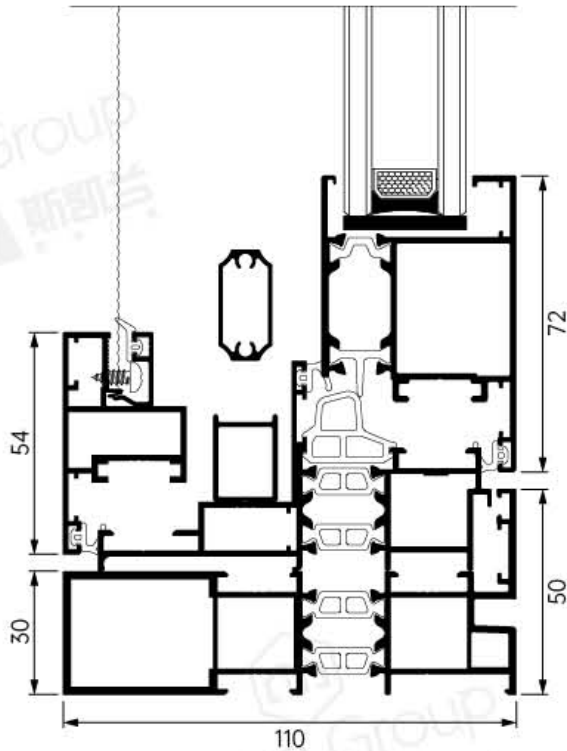

五金配件 Hardware accessories




产品颜色 Product color





YH-26012

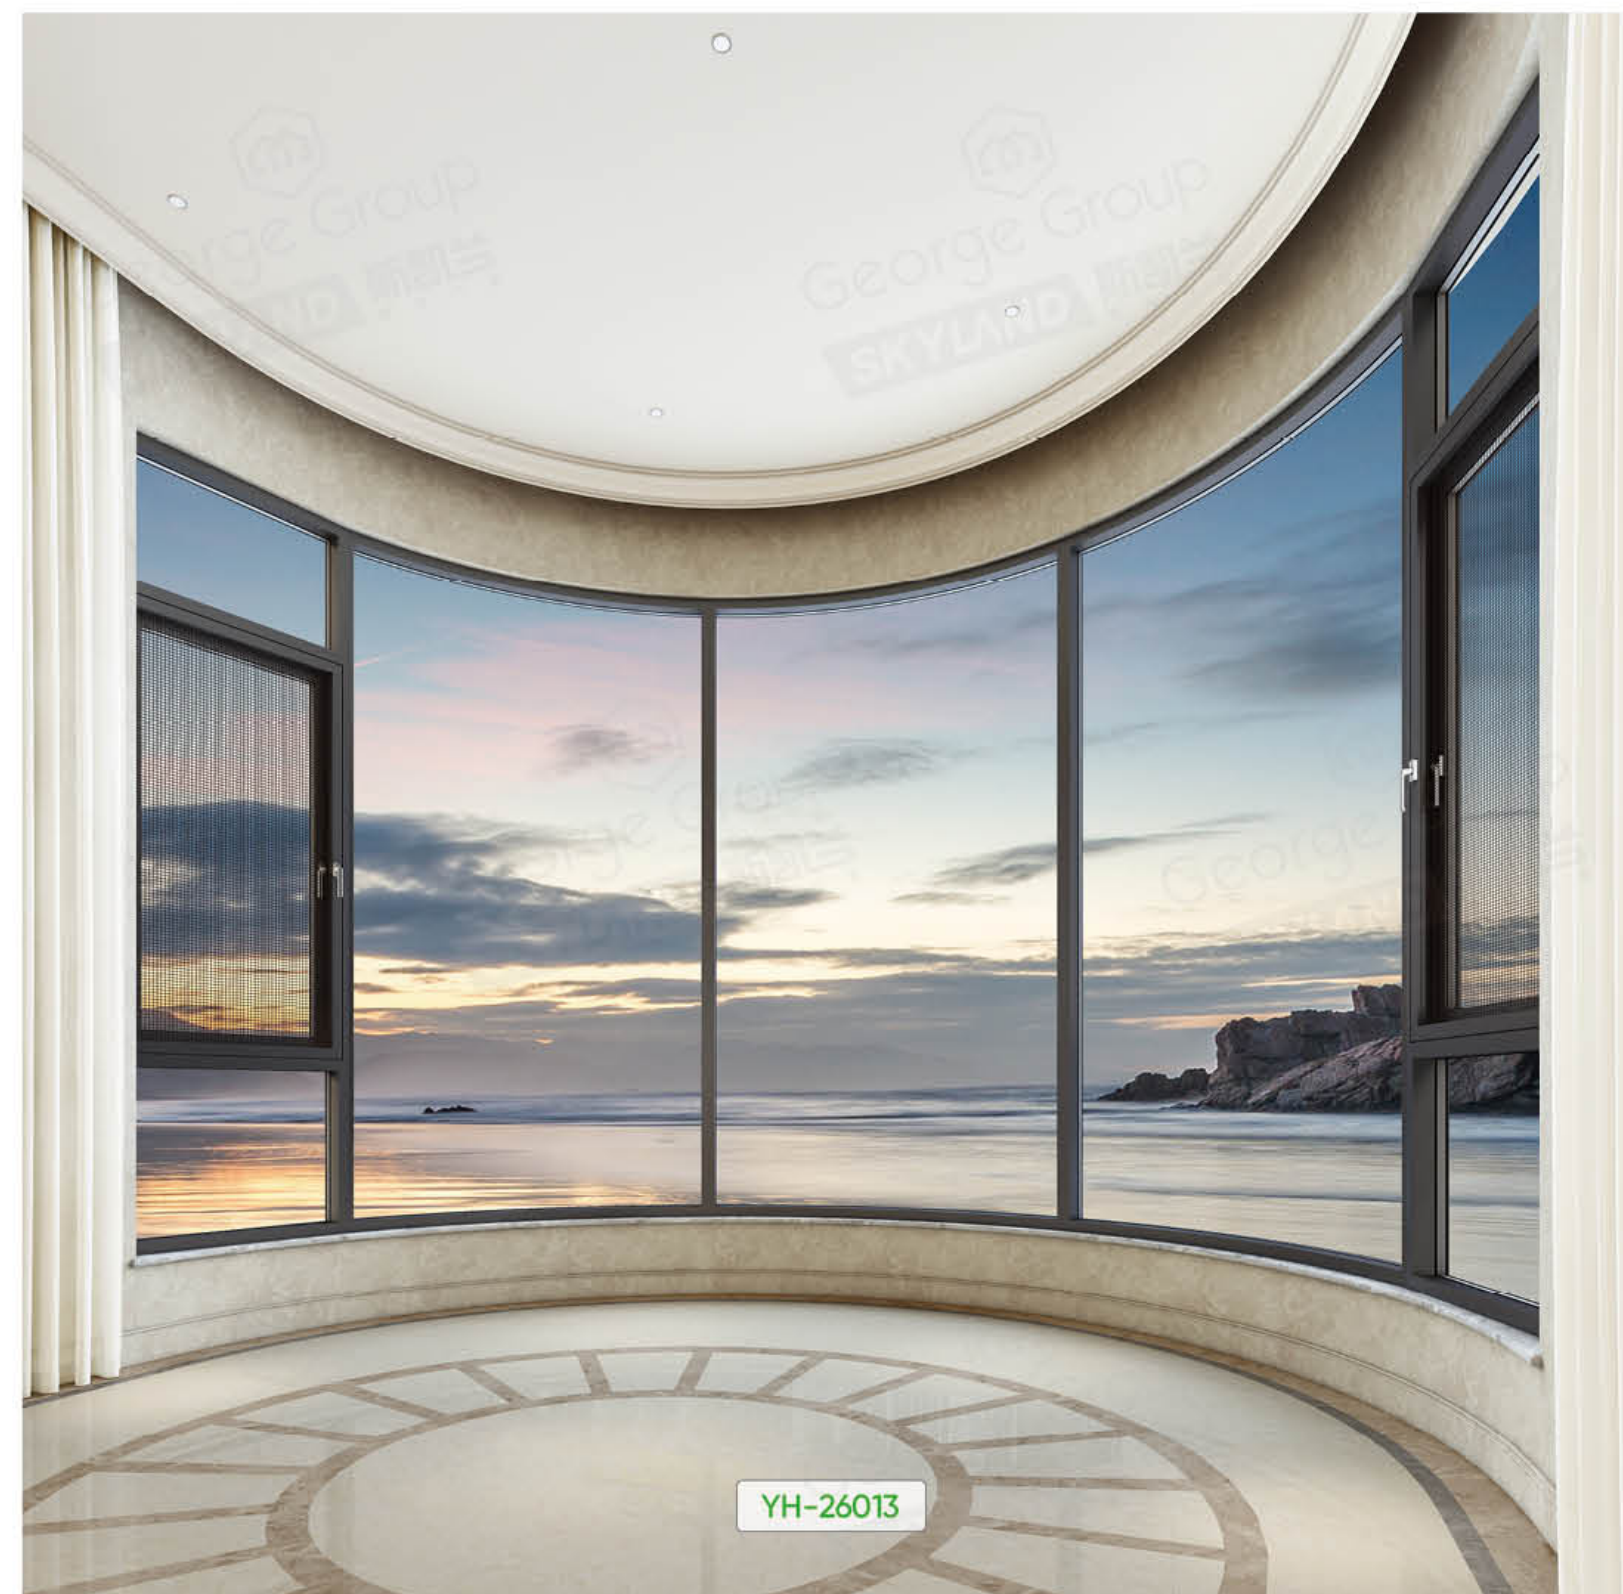

YH-26013



隐藏式排水系统

防止雨水倒灌

HIDDEN DRAINAGE SYSTEM
PREVENT RAINWATER FROM FLOWING BACK

采用垂直向下排水孔设计，利用重力加速排水速度，相比传统横向排水流量更大，减少积水滞留风险。

Adopting vertically downward drainage holes to accelerate drainage speed through gravity, achieving higher flow rate compared to traditional horizontal drainage and reducing water pooling risks.

110 云享

断桥窗纱一体平开窗


110 CLOUD ENJOYMENT
BRIDGE CUT WINDOW SCREEN INTEGRATED CASEMENT WINDOW

产品说明 Product description

- ◎ 铝型材采用 6063-T5 高强度 A 棒原生铝，强度高，抗裂变，韧度高。
Aluminum Profile: 6063-T5 high-strength A-grade primary aluminum, with high strength, resistance to cracking, and high toughness.
- ◎ 腔体结构 6 腔体，有效达到多层隔音，阻隔热量，增加窗户抗压能力。
6-Chamber Structure: Provides multi-layer sound insulation, heat resistance, and enhanced wind pressure resistance.
- ◎ PA66 多腔体尼龙隔热条，具有减低热传导保温节能、降低噪音等优点。
PA66 Multi-Chamber Nylon Thermal Break: Reduces thermal conduction, improves energy efficiency, and lowers noise.
- ◎ 台玻（信义）原片 5+20A+5，一体折弯中空铝条。
Glass: TAIWAN Glass (Xinyi) 5+20A+5 laminated glass with integrated bent aluminum spacer.
- ◎ 垂直多腔体等温线设计，形成一道有效的冷热条屏障，降低门窗整体耗能。
Vertical Multi-Chamber Isothermal Design: Creates an effective thermal barrier, reducing overall energy consumption.
- ◎ 304 不锈钢高清网、金钢网，不易生锈、耐腐蚀、采光性能突出，防虫更加有效。
304 Stainless Steel High-Density Mesh/Diamond Mesh: Rust-resistant, corrosion-resistant, with excellent light transmission and effective insect prevention.
- ◎ 胶条采用汽车级三元乙丙胶条，抗老化，提高密封、水密等级。
Seal: Automotive-grade EPDM rubber seal, resistant to aging, with enhanced air and water tightness.
- ◎ 隐藏排水设计，排水顺畅、易清理。
Hidden drainage design ensures smooth water flow and easy cleaning.
- ◎ 压线采用斜压线设计，三角力学，不易积灰，可视范围更宽阔，有效增加抗风压指数。
The pressure line adopts a diagonal pressure line design with triangular mechanics, which is not easy to accumulate dust and has a wider visible range, effectively increasing the wind pressure resistance index.



开启方式 Opening method


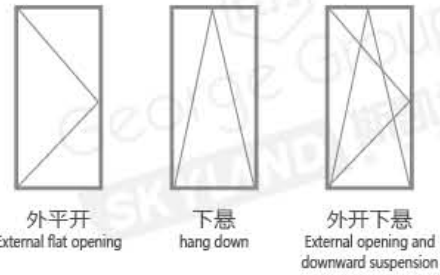


性能参数 Performance parameters

水密性能 /Water tightness performance	$\Delta p \geq 700$	7 级
气密性能 /Air tightness performance	$q_1 \leq 0.5$	8 级
抗风压性能 /Wind resistance performance	$p_3 \geq 5.0$	9 级
隔热性能 /Thermal insulation performance	$2.0 > k \geq 1.6$	6 级
隔音性能 /Sound insulation performance	$40 \leq R_w + C_{tr} < 45$	6 级

配置参数 Configuration parameters

型材壁厚: 2.0 Profile wall thickness: 2.0	占墙宽度: 110 Wall occupancy width: 110
型材纵深: 框 110/ 玻扇 47.3/ 纱扇 30 Profile depth: frame 110 / glass panel 47.3 / screen panel 30	可视面: 框 30/ 玻扇 72/ 纱扇 46 Visible surface: frame 30 / glass sash 72 / screen sash 46
玻璃配置: 5+20A+5 Glass configuration: 5 + 20A + 5	五金系列: 品牌五金 Hardware Series: Brand Hardware
开启扇适用: 宽度 700mm 内 / 高度 1500mm 内 Sliding sash suitable for: width within 700mm / height within 1500mm	

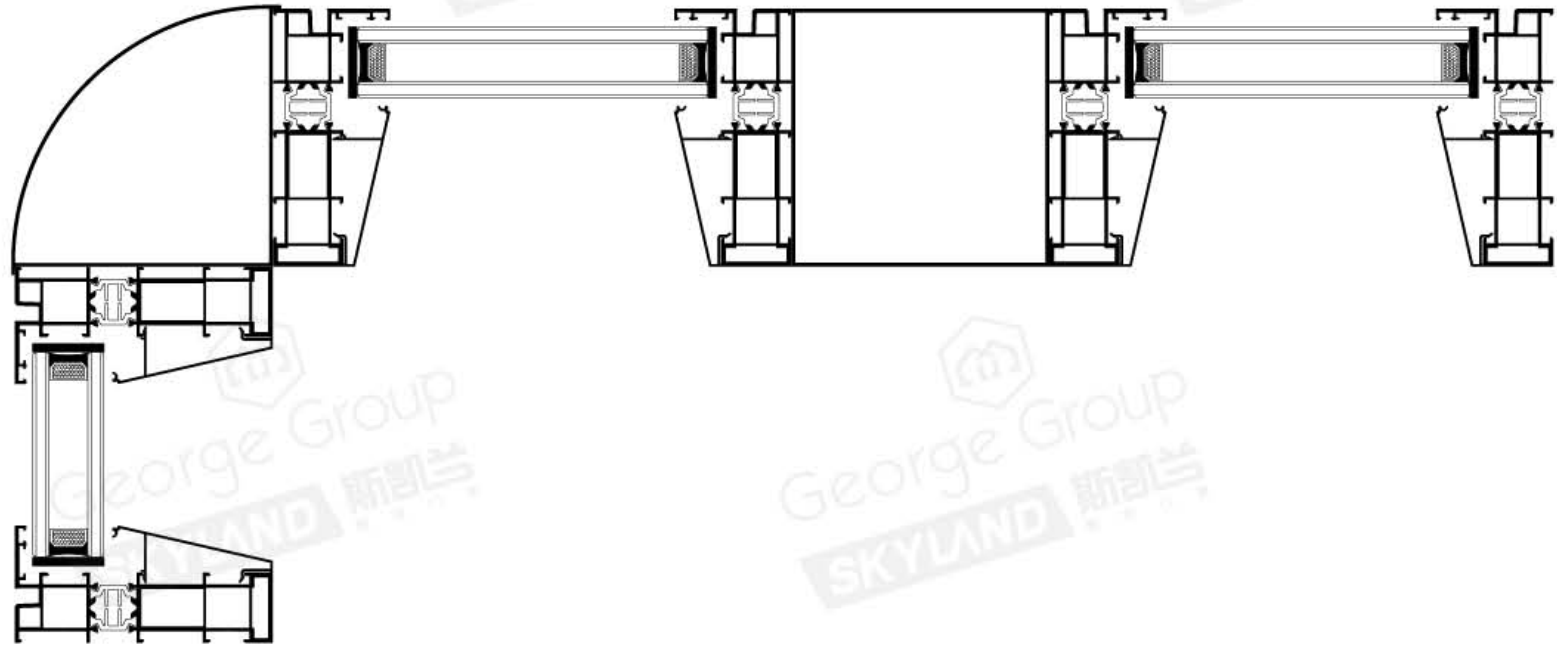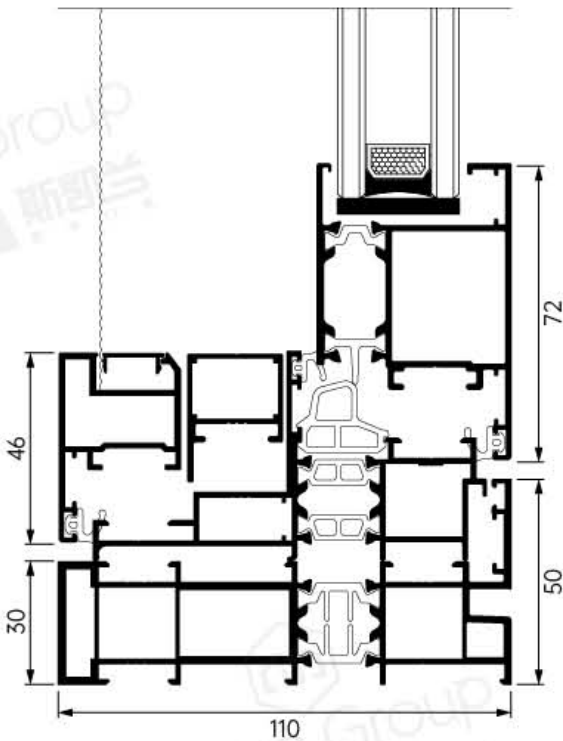

五金配件 Hardware accessories



产品颜色 Product color





YH-26014

精妙设计 好产品生而不凡

EXQUISITE DESIGN
GOOD PRODUCTS ARE BORN
EXTRAORDINARY

门窗是居室中最引人关注的内容，
它不仅关系到采光、通风、密封等功能需求，
也关系到线条、色泽等建筑需求，
更代表主人的审美情趣乃至理想的延伸、心灵的依托。

Doors and windows are the most eye-catching content in the living room,
It not only relates to functional requirements such as lighting, ventilation, and sealing,
It also relates to architectural requirements such as lines and colors,
It represents the owner's aesthetic taste, as well as the extension of their ideals and
the support of their soul.



YH-26015

126

断桥侧压窗


126 BROKEN BRIDGE SIDE PRESSURE WINDOW

产品说明 Product description

- ◎ 铝型材采用 6063-T5 高强度 A 棒原生铝，强度高，抗裂变，韧度高。
Aluminum Profile: 6063-T5 high-strength A-grade primary aluminum, with high strength, resistance to cracking, and high toughness.
- ◎ 腔体结构 4 腔体，有效达到多层隔音，阻隔热量，增加窗户抗压能力。
4-Chamber Structure: Provides multi-layer sound insulation, heat resistance, and enhanced wind pressure resistance.
- ◎ PA66 多腔体尼龙隔热条，具有减低热传导保温节能、降低噪音等优点。
PA66 Multi-Chamber Nylon Thermal Break: Reduces thermal conduction, improves energy efficiency, and lowers noise.
- ◎ 台玻（信义）原片 5+27A+5，一体折弯中空铝条。
Glass: TAIWAN Glass (Xinyi) 5+27A+5 laminated glass with integrated bent aluminum spacer.
- ◎ 密封性能优异，通过侧面压紧方式减少缝隙，隔绝噪音、风雨和灰尘。
Excellent sealing performance, reducing gaps through side compression, isolating noise, wind, rain, and dust.
- ◎ 结构稳固抗风压，受力均匀不易变形，高层或多风地区使用更可靠。
The structure is stable and resistant to wind pressure, with uniform stress and less deformation, making it more reliable for use in high-rise or windy areas.
- ◎ 安全系数高，闭合后锁点分布均匀，防盗性和防坠性优于普通平开窗。
High safety factor, even distribution of locking points after closure, better anti-theft and anti fall performance than ordinary casement windows.
- ◎ 保温隔热效果好，减少能量损耗，安全与实用兼顾，适配多种场景需求。
Good insulation effect, reducing energy loss, balancing safety and practicality, suitable for various scene needs.



开启方式 Opening method


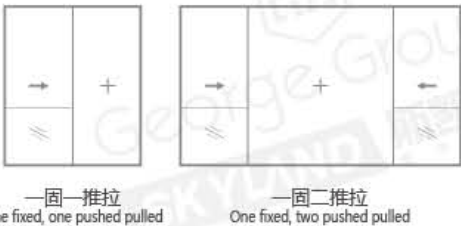


性能参数 Performance parameters

水密性能 /Water tightness performance	$\Delta p \geq 700$	7 级
气密性能 /Air tightness performance	$q_1 \leq 0.5$	8 级
抗风压性能 /Wind resistance performance	$p_3 \geq 5.0$	9 级
隔热性能 /Thermal insulation performance	$2.0 > k \geq 1.6$	6 级
隔音性能 /Sound insulation performance	$40 \leq R_w + C_{tr} < 45$	6 级

配置参数 Configuration parameters

型材壁厚: 2.0 Profile wall thickness: 2.0	占墙宽度: 126 Wall occupancy width: 126
型材纵深: 框 126/ 玻扇 48 Profile depth: frame 126 / glass panel 48	可视面: 框 30/ 玻扇 78 Visible surface: frame 30 / glass sash 78
玻璃配置: 5+27A+5 Glass configuration: 5 + 27A + 5	五金系列: 品牌五金 Hardware Series: Brand Hardware

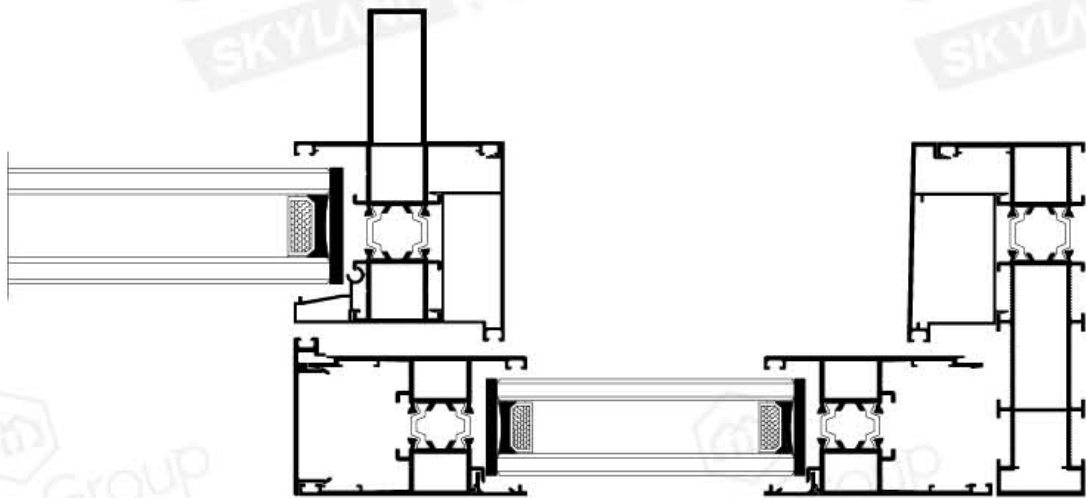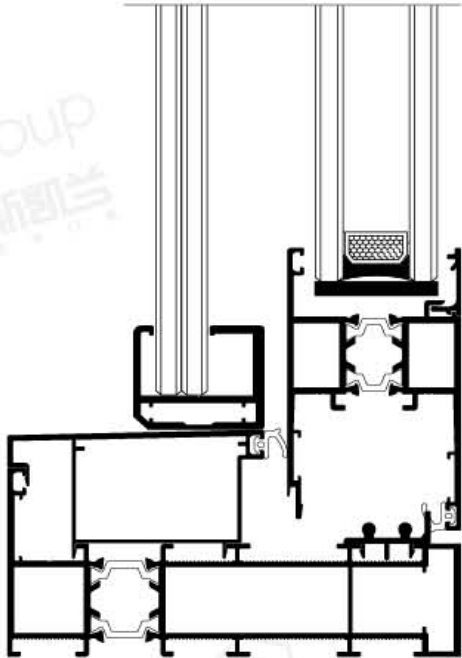

五金配件 Hardware accessories




产品颜色 Product color



个性化定制
让您的选择不留遗憾

PERSONALIZED CUSTOMIZATION
LET YOUR CHOICE LEAVE NO REGRETS

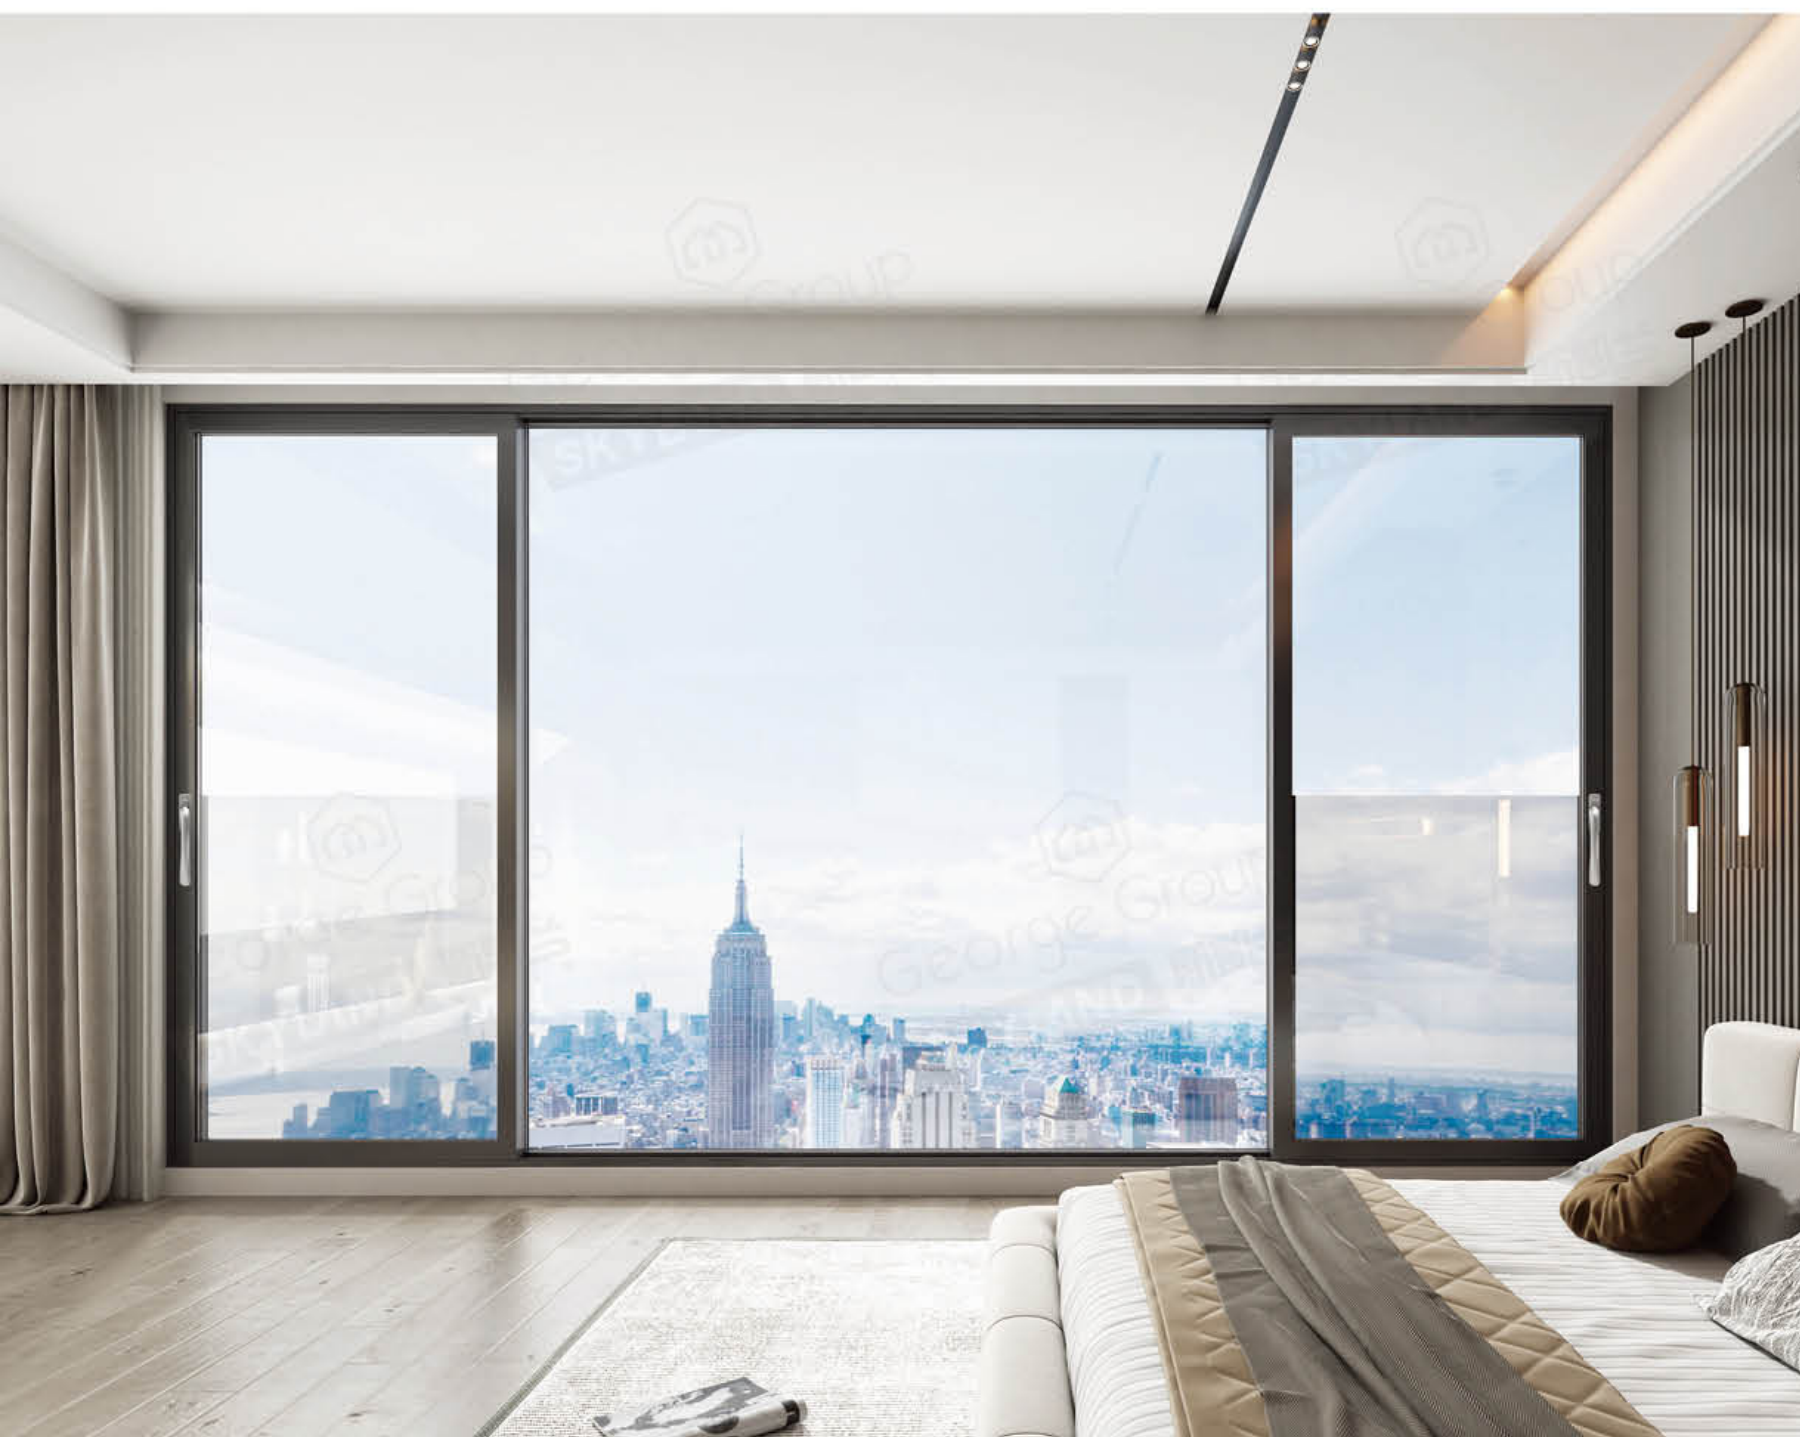

YH-26016



YH-26017

88

内开内倒平开窗


88 INTERNALLY OPEN AND INTERNALLY INVERTED CASEMENT WINDOW

产品说明 Product description

- ◎ 铝型材采用 6063-T5 高强度 A 棒原生铝，强度高，抗裂变，韧度高。
The aluminum profiles are made from 6063-T5 high-strength A-grade primary aluminum, offering high strength, resistance to cracking, and excellent toughness.
- ◎ 腔体结构 4 腔体，有效达到多层隔音，阻隔热量，增加窗户抗压能力。
The four cavity structure effectively achieves multi-layer sound insulation, blocks heat, and increases the pressure resistance of windows.
- ◎ PA66 多腔体尼龙隔热条，具有减低热传导保温节能、降低噪音等优点。
PA66 multi cavity nylon insulation strip has the advantages of reducing thermal conductivity, insulation, energy saving, and noise reduction.
- ◎ 台玻（信义）原片 5+20A+5，一体折弯中空铝条。
Taiwan Glass (Xinyi) original sheet 5+20A+5, integrated bent hollow aluminum strip.
- ◎ 垂直多腔体等温线设计，形成一道有效的冷热条屏障，降低门窗整体耗能。
Vertical multi cavity isotherm design forms an effective thermal barrier, reducing the overall energy consumption of doors and windows.
- ◎ 304 不锈钢高清网、金钢网，不易生锈、耐腐蚀、采光性能突出，防虫更加有效。
304 stainless steel high-definition mesh/steel mesh, not easy to rust, corrosion-resistant, and has good lighting performance. Can highlight and effectively prevent mosquitoes and insects.
- ◎ 胶条采用汽车级三元乙丙胶条，抗老化，提高密封、水密等级。
The rubber strip adopts automobile grade EPDM rubber strip, which is anti-aging and improves the sealing and water tightness.
- ◎ 隐藏排水设计，排水顺畅、易清理。
Hidden drainage design ensures smooth drainage and easy cleaning.
- ◎ 压线采用方压线设计，不易积灰，可视范围更宽阔，有效增加抗风压指数。
The pressure line adopts a square pressure line design, which is not easy to accumulate dust, has a wider visible range, and effectively increases the wind pressure resistance index.



开启方式 Opening method





性能参数 Performance parameters


水密性能 / Water tightness performance	$\Delta p \geq 700$	8 级
气密性能 / Air tightness performance	$q_1 \leq 0.5$	7 级
抗风压性能 / Wind resistance performance	$p_3 \geq 5.0$	9 级
隔热性能 / Thermal insulation performance	$2.0 > k \geq 1.6$	6 级
隔音性能 / Sound insulation performance	$40 \leq R_w + C_{tr} < 45$	6 级

配置参数 Configuration parameters

型材壁厚: 1.5 Profile wall thickness: 1.5	占墙宽度: 88 Wall occupancy width: 88
型材纵深: 框 88/ 玻扇 65.7/ 纱扇 20.2 Profile depth: frame 88 / glass panel 65.7 / screen panel 20.2	可视面: 框 40/ 玻扇 78/ 纱扇 35.6 Visible surface: frame 40 / glass sash 78 / screen panel 35.6
玻璃配置: 5+20A+5 Glass configuration: 5 + 20A + 5	五金系列: 品牌五金 Hardware Series: Brand Hardware
开启扇适用: 宽度 700mm 内 / 高度 1500mm 内 Sliding sash suitable for: width within 700mm / height within 1500mm	

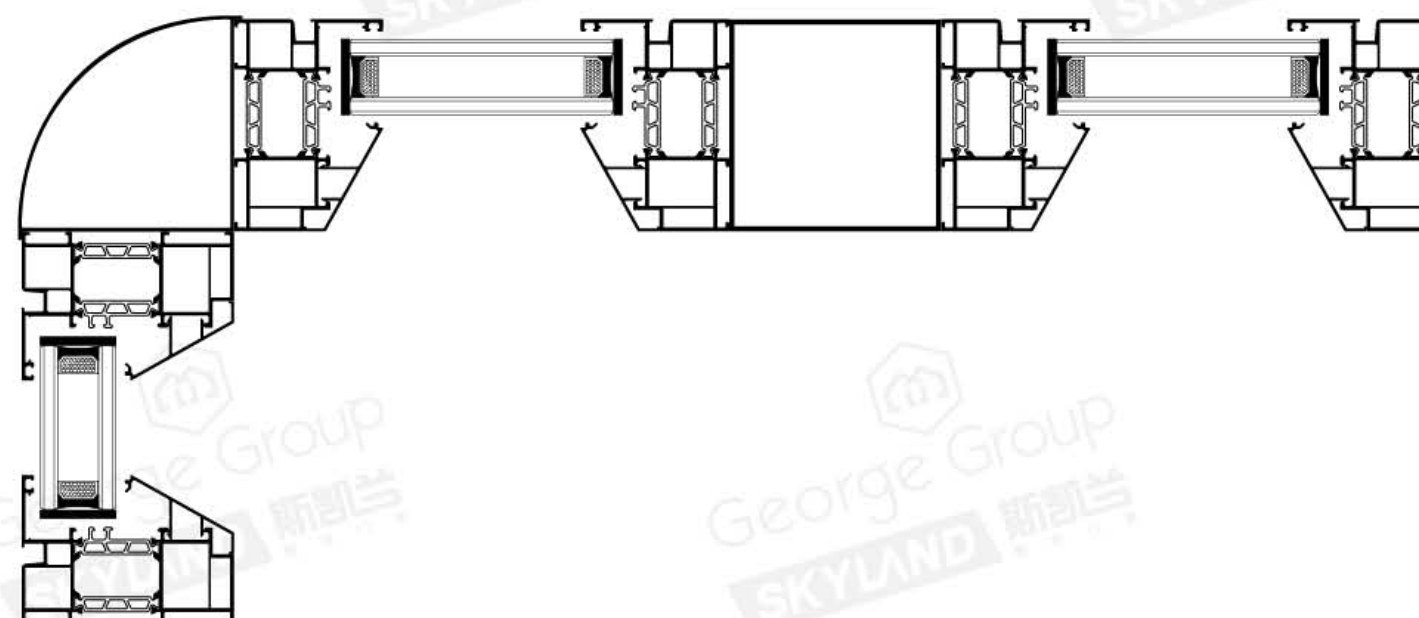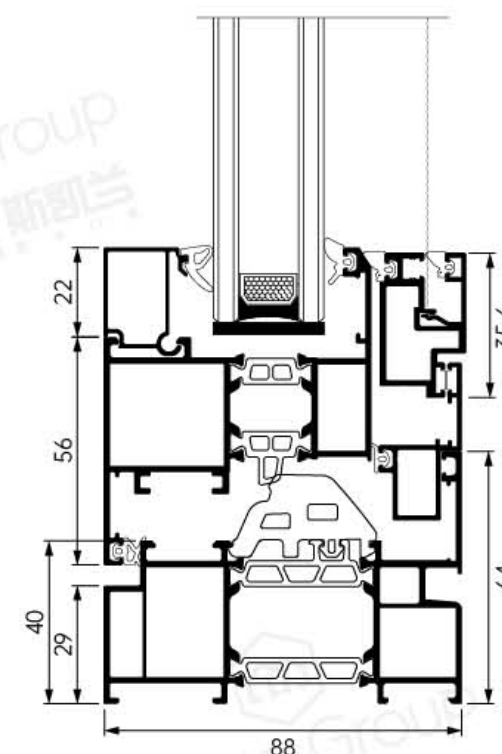

五金配件 Hardware accessories

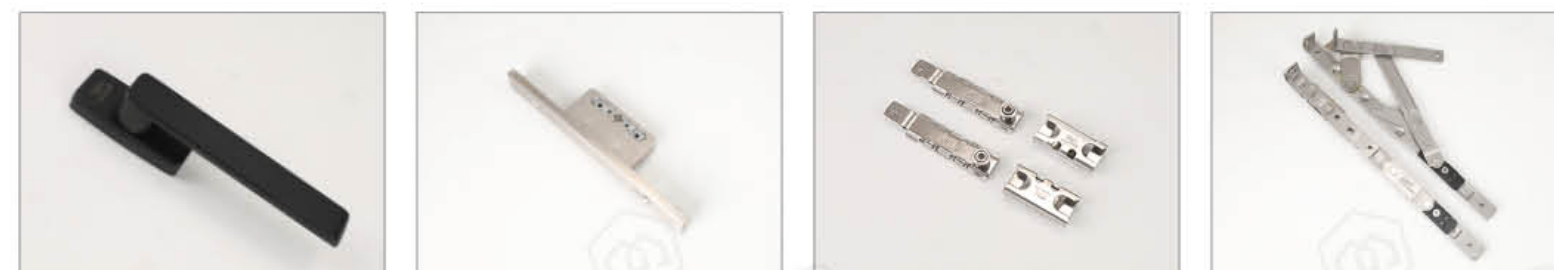

产品颜色 Product color



于细节中追求精品
于无声处彰显品质

PURSUING EXCELLENCE IN DETAILS
HIGHLIGHT QUALITY IN SILENCE



YH-26018

我们致力于不断优化与创新，
用最前沿的技术使轮廓更为美观利落，线条更佳流畅，能见其中深蕴。

We are committed to continuous optimization and innovation,
Using cutting-edge technology to make the contours more beautiful and neat, the lines more
streamlined, and the profound meaning can be seen.



YH-26019

128

六轨悬浮推拉窗


128 SIX TRACK SUSPENDED SLIDING WINDOW

产品说明 Product description

- ◎ 铝型材采用 6063-T5 高强度 A 棒原生铝，强度高，抗裂变，韧度高。
Aluminum Profile: 6063-T5 high-strength A-grade primary aluminum, with high strength, resistance to cracking, and high toughness.
- ◎ 上轨装防摆轮，嵌入式框包扇结构设计，确保框扇之间的密封效果，提升整窗的防水性、气密性，更安全。
Install anti balance wheels on the upper track and design embedded frame fan structure to ensure the sealing effect between the frame and fan, improve the waterproof and airtight properties of the entire window, and make it safer.
- ◎ 下轨双下轨六轨道设计，双滑轮不锈钢轨道，推拉更顺畅，可装大扶手。
The lower rail has a dual lower rail and six rail design, with double pulley stainless steel rails for smoother pushing and pulling, and can be equipped with large handrails.
- ◎ PA66 多腔体尼龙隔热条，具有减低热传导保温节能、降低噪音等优点。
PA66 multi cavity nylon insulation strip has the advantages of reducing thermal conductivity, insulation, energy saving, and noise reduction.
- ◎ 台玻（信义）原片 5+15A+5，一体折弯中空铝条。
Taiwan Glass (Xinyi) original sheet 5+15A+5, integrated bent hollow aluminum strip.
- ◎ 304 不锈钢高清网 / 金钢网，不易生锈、耐腐蚀、采光性能突出，有效防蚊虫。
304 stainless steel high-definition mesh/steel mesh, not easy to rust, corrosion-resistant, outstanding lighting performance, effectively preventing mosquitoes and insects.
- ◎ 下轨坡道排水设计，排水顺畅，无积水。
The drainage design of the downhill ramp ensures smooth drainage and no accumulation of water.
- ◎ 悬浮窗外观时尚，整体效果简洁流畅又美观。
The suspended window has a stylish appearance, and the overall effect is simple, smooth, and beautiful.



开启方式 Opening method


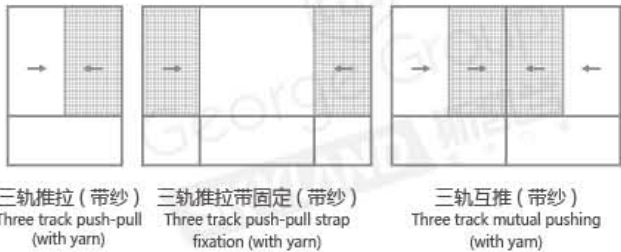


性能参数 Performance parameters

水密性能 / Water tightness performance	$\Delta p \geq 700$	7 级
气密性能 / Air tightness performance	$q_1 \leq 0.5$	8 级
抗风压性能 / Wind resistance performance	$p_3 \geq 5.0$	9 级
隔热性能 / Thermal insulation performance	$2.0 > k \geq 1.6$	6 级
隔音性能 / Sound insulation performance	$40 \leq R_w + C_{tr} < 45$	6 级

配置参数 Configuration parameters

型材壁厚: 2.0 Profile wall thickness: 2.0	占墙宽度: 127.6 Wall occupancy width: 127.6
型材纵深: 框 123/ 玻扇 30/ 纱扇 30 Profile depth: frame 123 / glass panel 30 screen panel 30	可视面: 框 72.6/ 玻扇 30/ 纱扇 30 Visible surface: frame 72.6 / glass sash 30 screen panel 30
玻璃配置: 5+15A+5 Glass configuration: 5 + 15A + 5	五金系列: 品牌五金 Hardware Series: Brand Hardware

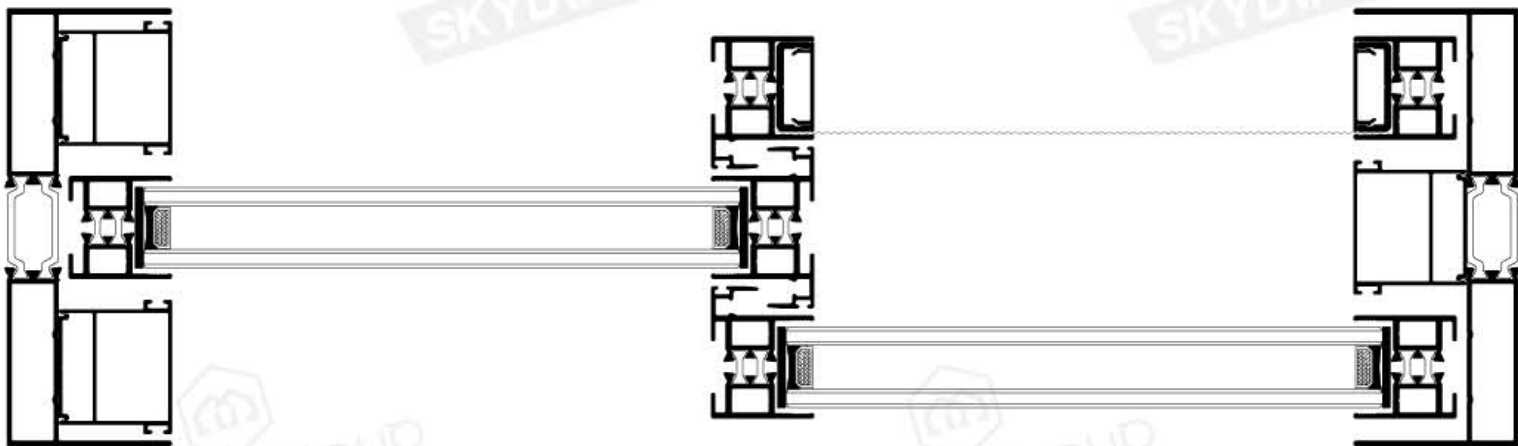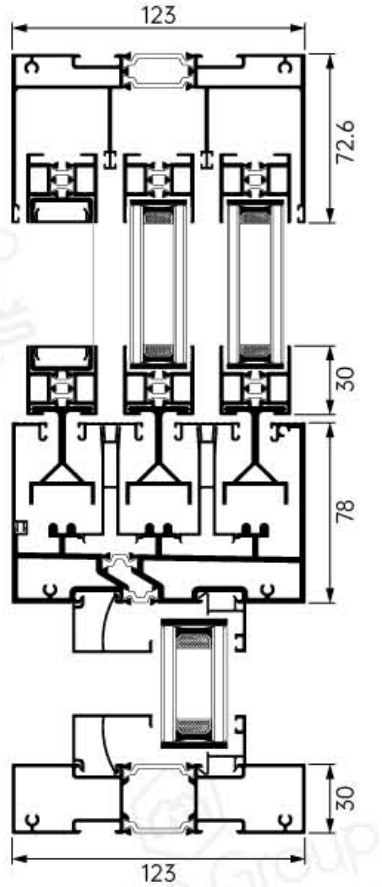

五金配件 Hardware accessories



产品颜色 Product color



128

六轨全景推拉窗


128 SIX TRACK PANORAMIC SLIDING WINDOW

产品说明 Product description

- ◎ 铝型材采用 6063-T5 高强度 A 棒原生铝，强度高，抗裂变，韧度高。
Aluminum Profile: 6063-T5 high-strength A-grade primary aluminum, with high strength, resistance to cracking, and high toughness.
- ◎ 上轨装防摆轮，嵌入式框包扇结构设计，确保框扇之间的密封效果，提升整窗的防水性、气密性，更安全。
Install anti balance wheels on the upper rail and design embedded frame fan structure to ensure the stability between the frame and fan sealing effect enhances the waterproof and airtight properties of the entire window, making it safer.
- ◎ 下轨双下轨六轨道设计，双滑轮不锈钢轨道，推拉更顺畅，可装大扶手。
The lower rail has a dual lower rail and six rail design, with double pulley stainless steel rails for smoother pushing and pulling, and can be equipped with large handrails.
- ◎ PA66 多腔体尼龙隔热条，具有减低热传导保温节能、降低噪音等优点。
PA66 multi cavity nylon insulation strip has the advantages of reducing thermal conductivity, insulation, energy saving, and noise reduction.
- ◎ 台玻（信义）原片 5+15A+5，一体折弯中空铝条。
Taiwan Glass (Xinyi) original sheet 5+15A+5, integrated bent hollow aluminum strip.
- ◎ 304 不锈钢高清网 / 金钢网，不易生锈、耐腐蚀、采光性能突出，有效防蚊虫。
304 stainless steel high-definition mesh/steel mesh, not easy to rust, corrosion-resistant, outstanding lighting performance, effectively preventing mosquitoes and insects.
- ◎ 下轨坡道隐藏排水设计，排水顺畅，无积水。
Concealed drainage design for the downhill ramp ensures smooth drainage and no standing water.
- ◎ 全景推拉窗外观时尚，采光度更高，空间更通透。
The panoramic sliding window has a stylish appearance, higher lighting, and more transparent space.



开启方式 Opening method


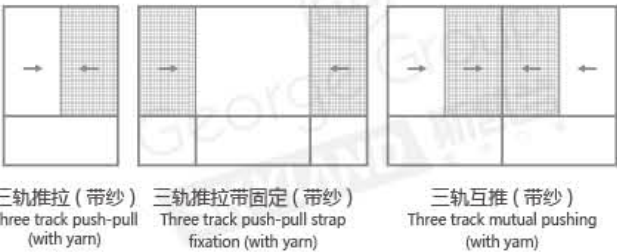


性能参数 Performance parameters

水密性能 / Water tightness performance	$\Delta p \geq 700$	7 级
气密性能 / Air tightness performance	$q1 \leq 0.5$	8 级
抗风压性能 / Wind resistance performance	$p3 \geq 5.0$	9 级
隔热性能 / Thermal insulation performance	$2.0 > k \geq 1.6$	6 级
隔音性能 / Sound insulation performance	$40 \leq Rw + C_{tr} < 45$	6 级

配置参数 Configuration parameters

型材壁厚: 2.0 Profile wall thickness: 2.0	占墙宽度: 127.6 Wall occupancy width: 127.6
型材纵深: 框 123/ 玻扇 30/ 纱扇 30 Profile depth: frame 123 / glass panel 30 screen panel 30	可视面: 框 72.6/ 玻扇 30/ 纱扇 30 Visible surface: frame 72.6 / glass sash 30 screen panel 30
玻璃配置: 5+15A+5 Glass configuration: 5 + 15A + 5	五金系列: 品牌五金 Hardware Series: Brand Hardware

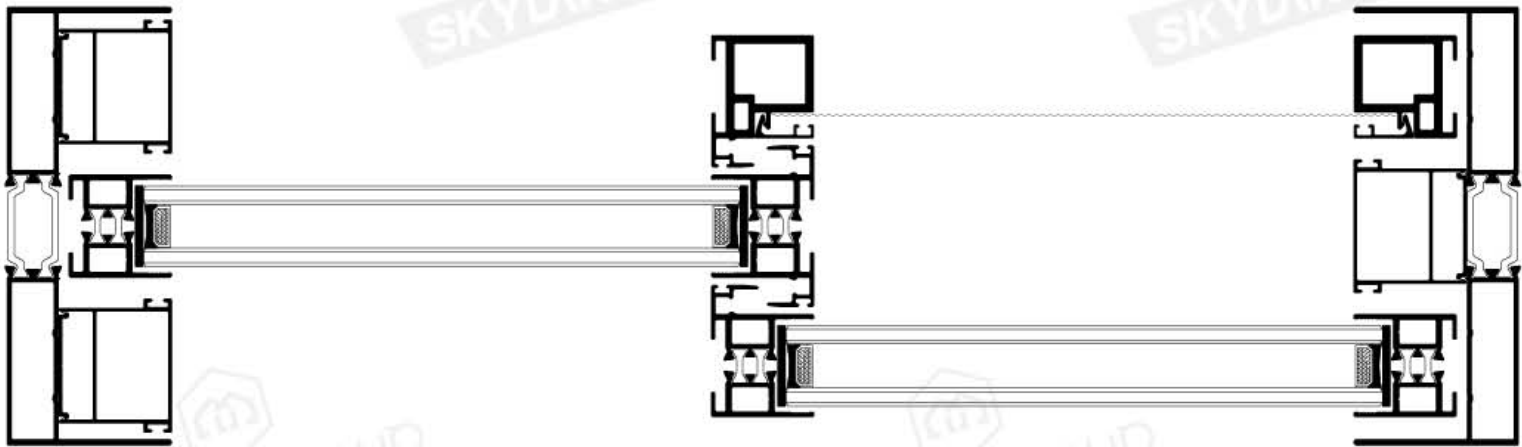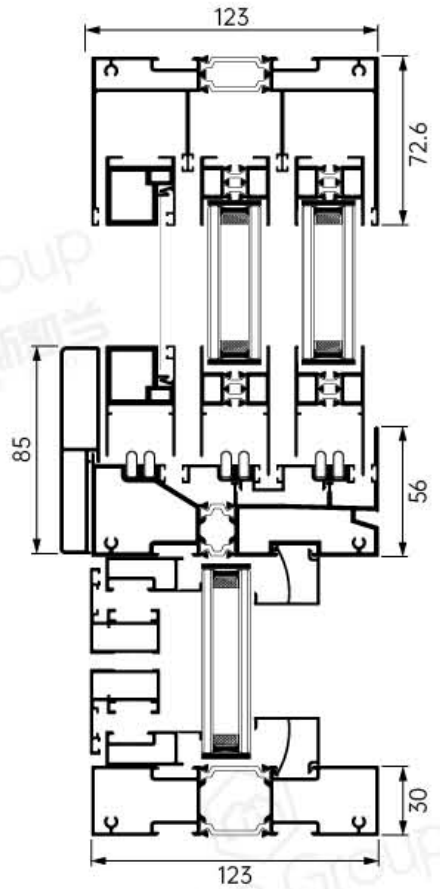

五金配件 Hardware accessories



产品颜色 Product color





极致大扶手设计

ULTIMATE LARGE ARMREST DESIGN

方便舒适，提高空间利用率
大扶手完美解决没有窗台的痛点，方便舒适，
可供短暂休息或者放置杯子等物品。

Convenient and comfortable, improving space utilization
The large armrest perfectly solves the pain point of no window
sill, convenient and comfortable,
Can be used for short breaks or to place items such as cups.



超实用 可开启晒衣杆

SUPER PRACTICAL AND OPENABLE CLOTHES DRYING ROD

闭合时，起到安全防护作用
开启时，晾晒衣物更方便，不占空间，即开即用

When closed, it plays a role in safety protection
When turned on, drying clothes is more convenient and does
not take up space, making it ready to use immediately



68

防夹手折叠门

68 ANTI PINCH FOLDING DOOR

产品说明 Product description

- ◎ 铝型材采用 6063-T5 高强度 A 棒原生铝，强度高，抗裂变，韧度高。

The aluminum profile is made of 6063-T5 high-strength A-bar primary aluminum, which has high strength, fission resistance, and toughness.

- ◎ 型材壁厚 1.6-2.0mm，标配 5+18A+5 中空玻璃，可内置磁控与电动百叶。

The wall thickness of the profile is 1.6-2.0mm, and 5+18A+5 insulated glass is standard. It can be equipped with built-in magnetic control and electric louvers.

- ◎ 防夹手设计考虑到安全问题，有效避免手指被划伤的风险。

The anti pinch design considers safety issues and effectively avoids the risk of finger scratches.

- ◎ 在开启时可以折叠起来，占用空间很小，增加家庭的使用空间和保持更好的通风效果。

When opened, it can be folded up, taking up very little space, increasing the household's usage space and maintaining better ventilation.

- ◎ 新颖的款式和多样的花式选择，可以与不同的家居风格相匹配，提升家居的整体美感。

Novel styles and diverse artistic choices can match different home styles, enhancing the overall beauty of the home.

边框上轨 Rail on the border	上下轨 Up and down tracks	小边框 Small border	边框上轨辅料 Rail accessories on the frame	光企 Guangqi
大中柱 Large and medium-sized pillars	小中柱 Small central pillar	小中柱收口 Small pillar closure	单 +0 边框收口 Single+0 border closure	单 +0 光企收口 Single+0 Light Enterprise Closing
光企收口 Guangqi Closing	上轨 upper rail	90 门套线 90 door frame line	110 门套线 110 door frame line	





YH-26024

75 重型折叠门

75 HEAVY-DUTY FOLDING DOOR



产品说明 Product description

- ◎ 铝型材采用 6063-T5 高强度 A 棒原生铝，强度高，抗裂变，韧度高。

The aluminum profile is made of 6063-T5 high-strength A-bar primary aluminum, which has high strength, fission resistance, and toughness.

- ◎ 型材壁厚 1.6-2.0mm，标配 5+18A+5 中空玻璃，可内置磁控与电动百叶。

The wall thickness of the profile is 1.6-2.0mm, and 5+18A+5 insulated glass is standard. It can be equipped with built-in magnetic control and electric louvers.

- ◎ 多功能开启方式，可内折、外折，可左折、右折，可单扇平开，双扇对开，满足不同需求。


The multifunctional opening modes include inward folding, outward folding, left folding, right folding, single-sided swing, and double-sided swing, catering to diverse needs.

- ◎ 在开启时可以折叠起来，占用空间很小，增加家庭的使用空间和保持更好的通风效果。


When opened, it can be folded up, taking up very little space, increasing the household's usage space and maintaining better ventilation.

- ◎ 新颖的款式和多样的花式选择，可以与不同的家居风格相匹配，提升家居的整体美感。


Novel styles and diverse artistic choices can match different home styles, enhancing the overall beauty of the home.




75 大折叠门光企
75 major folding door light enterprises




75 大折叠门边框
75 large folding door frame




75 大折叠门地轨
75 fold door ground rail




75 大折叠门地轨
75 fold door ground rail




75 大折叠门辅料
75 large folding door accessories



75 大折叠门光企收口
75 fold door light enterprise closing




75 大折叠门边框收口
75 fold door frame closure



75 大折叠门收口光企
75 fold door closure light enterprise



75 大折叠门单玻转换条
75 fold door single glass conversion strip



75 大折叠门传动杆
75 fold door drive rod



精工艺 · 臻品质

EXQUISITE CRAFTSMANSHIP
ULTIMATE QUALITY

重型折叠门能够极大化空间开合与提升整体美观性，尤其适合需要灵活分隔大空间或追求通透视觉效果场景。

Heavy duty folding doors can maximize the opening and closing of space and enhance overall aesthetics, especially suitable for scenes that require flexible separation of large spaces or pursue transparent visual effects.





YH-26026

结构稳固
安全性强

STRUCTURALLY STABLE
STRONG SECURITY

重型折叠门的型材厚度和承重能力
远超普通折叠门，抗风压、抗变形能力强。

The profile thickness and load-bearing capacity of heavy-duty folding doors far exceed those of ordinary folding doors, with strong resistance to wind pressure and deformation.


极窄推拉门

ULTRA-NARROW SLIDING DOOR

产品颜色 Product color




黑色 /black




白色 /white




原木纹色 /wood grain color

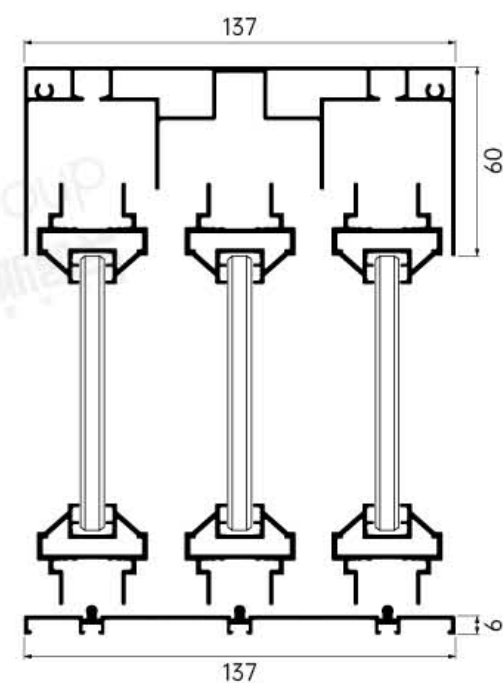

YH-26027

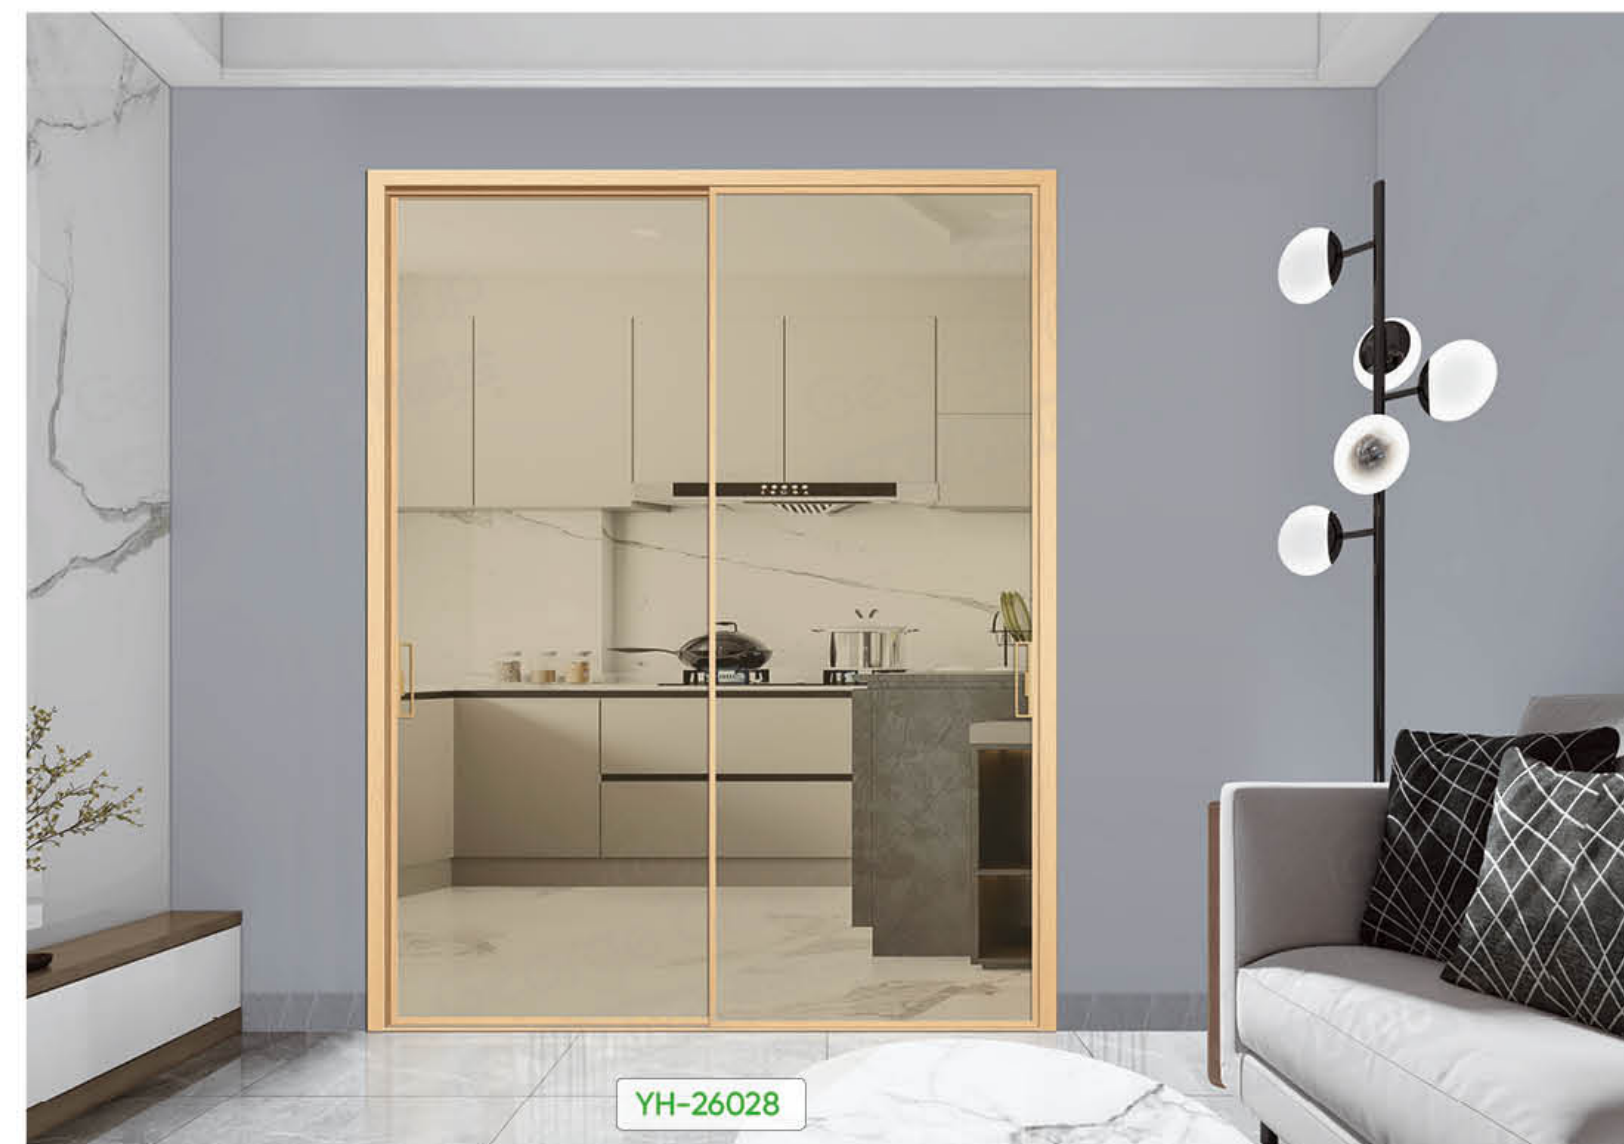

YH-26028

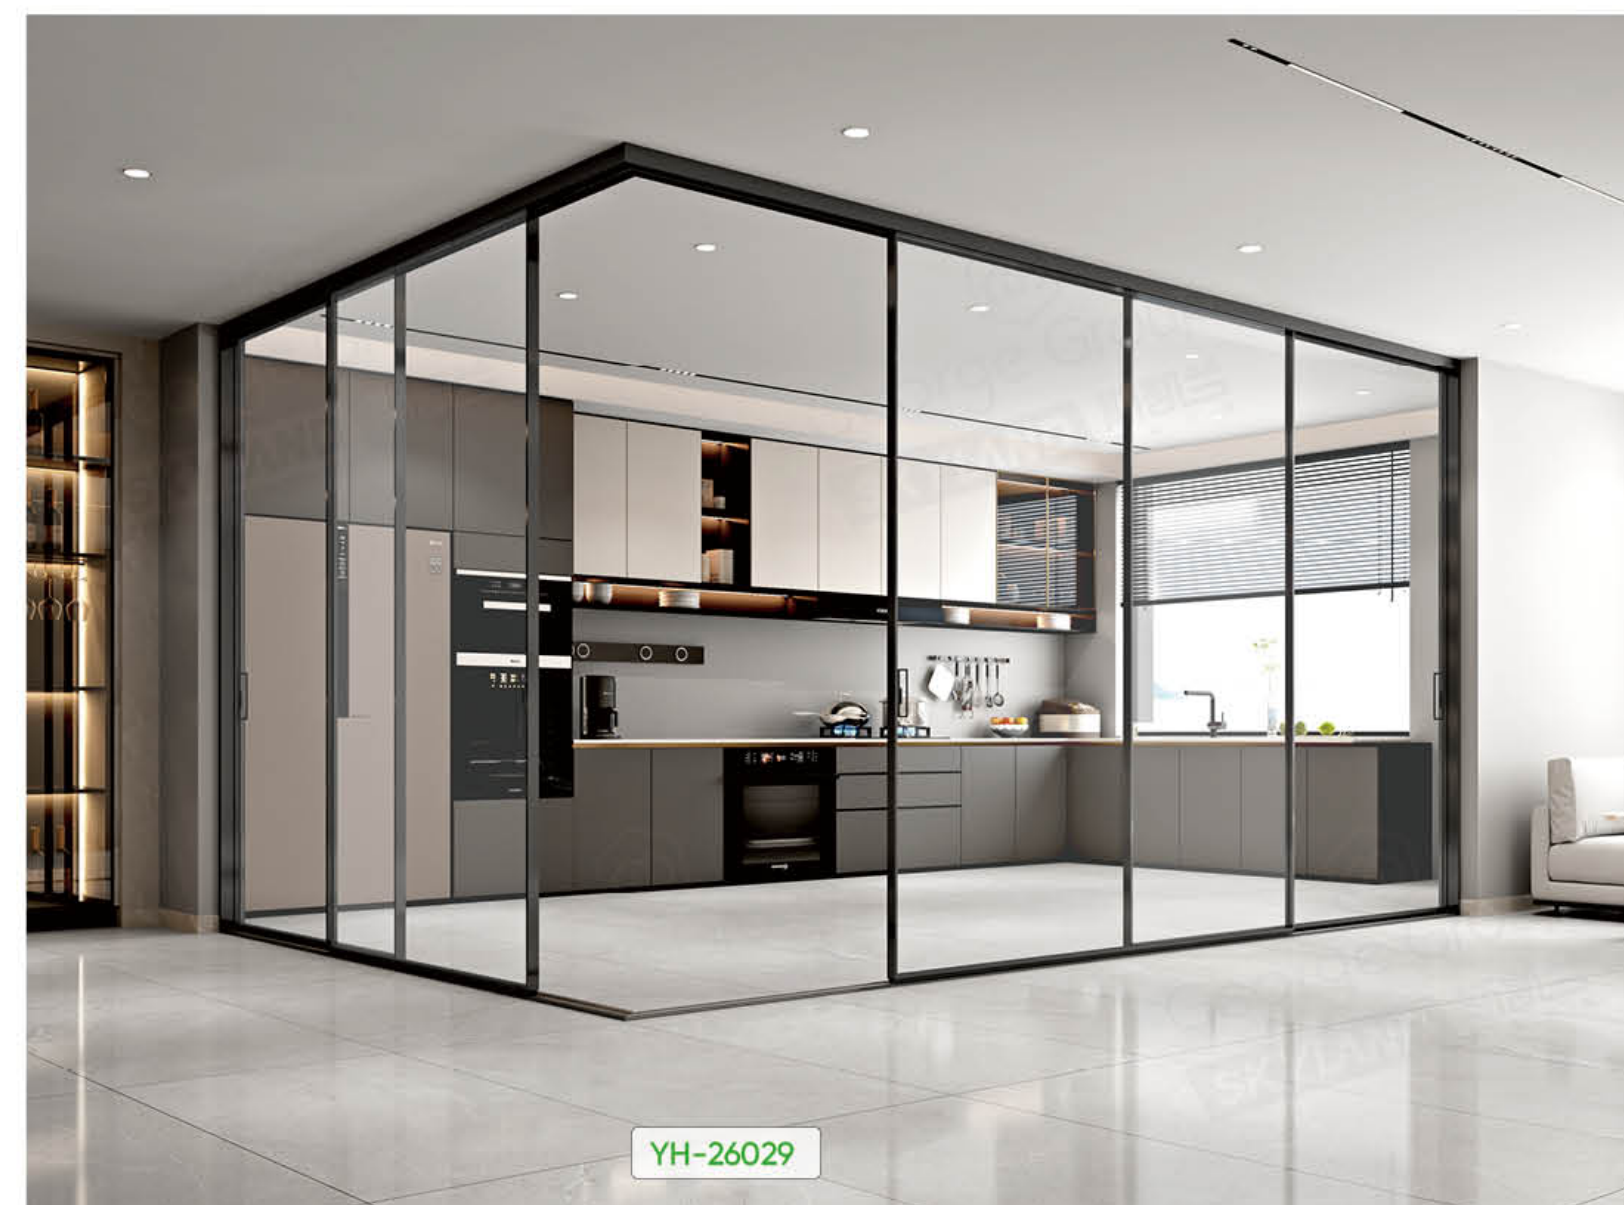

YH-26029

铝木门

ALUMINUM-WOOD DOOR

铝木门在选材和生产过程中注重环保，采用了环保材料和生产工艺，因此在使用过程中无毒害、不产生有害气体。而且铝木门的密封性能好，能够有效隔热、隔音，具有较好的节能效果。

Aluminum wooden doors pay attention to environmental protection in the selection and production process, using environmentally friendly materials and production processes, so they are non-toxic and do not produce harmful gases during use. Moreover, aluminum wooden doors have good sealing performance, which can effectively insulate and soundproof, and have good energy-saving effects.



阳光房

SUNROOM

阳光房的视线范围非常大，可以让人感受到温暖的阳光和自然的气息。可以作为一个茶室、书房、休息室等，让人享受不同的生活乐趣。

The sunroom has a very wide line of sight, allowing people to feel the warm sunshine and natural atmosphere. Can serve as a tea room, study, lounge, etc., allowing people to enjoy different pleasures of life.



55 平开门

55 SWING DOOR


产品颜色 Product color



氟碳灰 / fluorocarbon gray 星巴咖啡 / starbucks coffee 黑金石 / black gold stone



黑色 / black

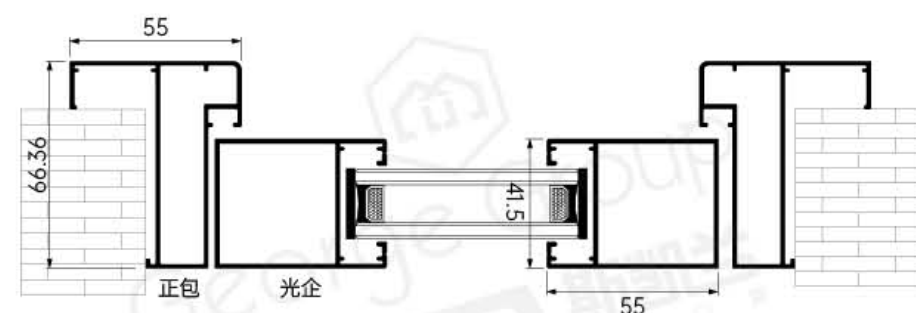

YH-26032



18 平开门

18 SWING DOOR

产品颜色 Product color



黑色 / black 白色 / white 原木纹色 / wood grain color



YH-26034



YH-26033



YH-26035

上下提拉窗

VERTICAL SLIDING WINDOW



上下折叠窗

HINGED FOLDING WINDOW



微型电动升降窗

MICRO ELECTRIC LIFTING WINDOW

微型电动升降窗的优点是体积小、操作便捷，能在小空间内高效实现窗户的自动升降，同时兼顾安全性与节能性。

The advantages of micro electric lifting windows are small size, convenient operation, and the ability to efficiently achieve automatic lifting of windows in small spaces, while balancing safety and energy efficiency.



智能电动升降窗

INTELLIGENT ELECTRIC LIFTING WINDOW

智能电动升降窗的特点是能够智能联动与主动适应的性能，它在电动升降基础上，通过感知、互联和自动化逻辑，实现更贴合用户需求的便捷与安全体验。

The characteristic of intelligent electric lifting windows is their ability to intelligently link and actively adapt. Based on electric lifting, it achieves a more convenient and safe experience that meets user needs through perception, interconnection, and automation logic.



复古平开门

RETRO SWING DOOR

产品颜色 Product color



黑色 /black




白色 /white



原木纹色 /wood grain color



YH-26042

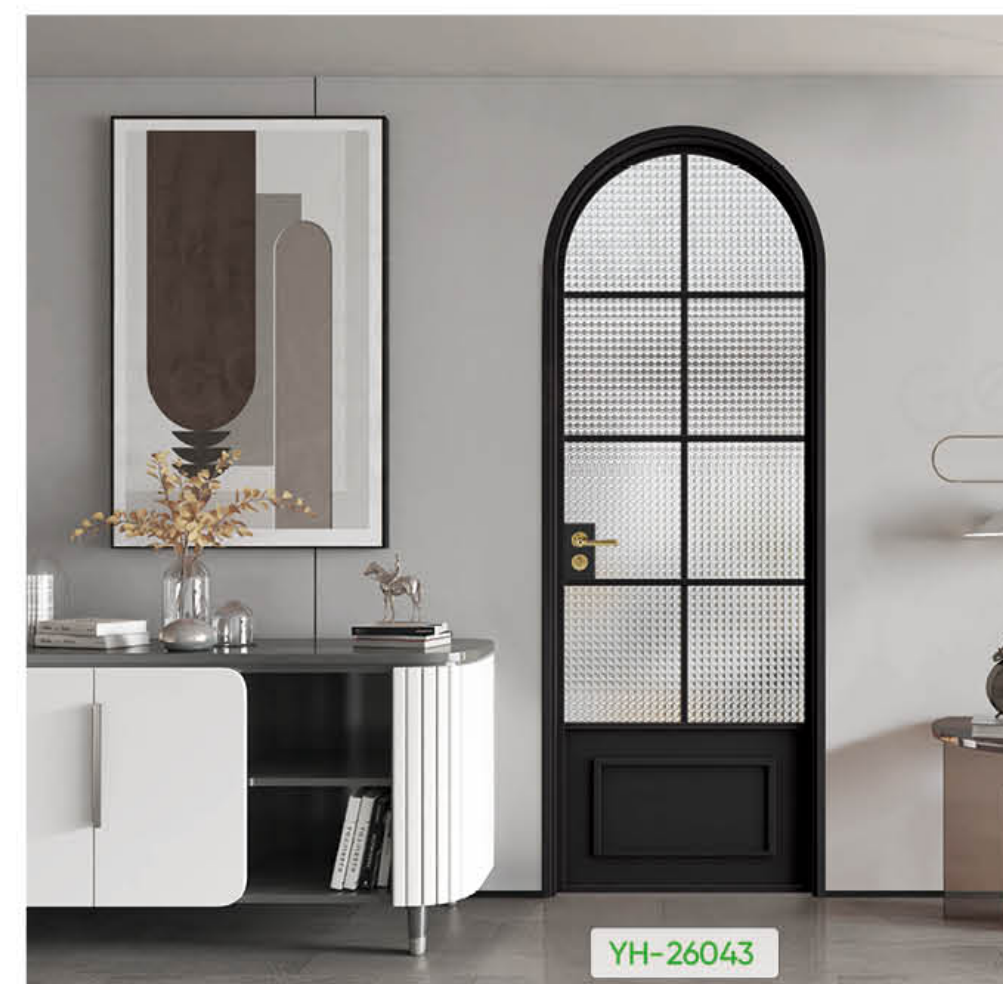

YH-26043

复刻经典工艺，
每一扇门都是时光打磨的艺术品。
不追逐潮流，只坚守质感，复古门的韵味，
在于历经岁月仍历久弥新。

Reproducing classic craftsmanship, every door
is a work of art polished by time.
Not chasing trends, only sticking to texture.
The charm of retro doors lies in their enduring
freshness over time.



YH-26044



Song Aesthetics

「宋式美学」

宋氏美学是宋代的独特美学风格，表达内敛、理性、朴素与雅致的态度，追求一种超越形式的内在精神和意境。



Song aesthetics is a unique aesthetic style of the Song Dynasty, expressing an attitude of introversion, rationality, simplicity, and elegance, pursuing an inner spirit and artistic conception that transcends form.

隐框幕墙

HIDDEN FRAME CURTAIN WALL

隐框设计使幕墙外立面极为平整，几乎看不到外框，玻璃之间的拼缝极窄，整体感强，能显著提升建筑的现代感和档次，营造出简洁、通透的视觉效果。

The hidden frame design makes the exterior facade of the curtain wall extremely flat, with almost no visible outer frame. The seams between the glass are extremely narrow, creating a strong overall sense and significantly enhancing the modernity and grade of the building, creating a simple and transparent visual effect.

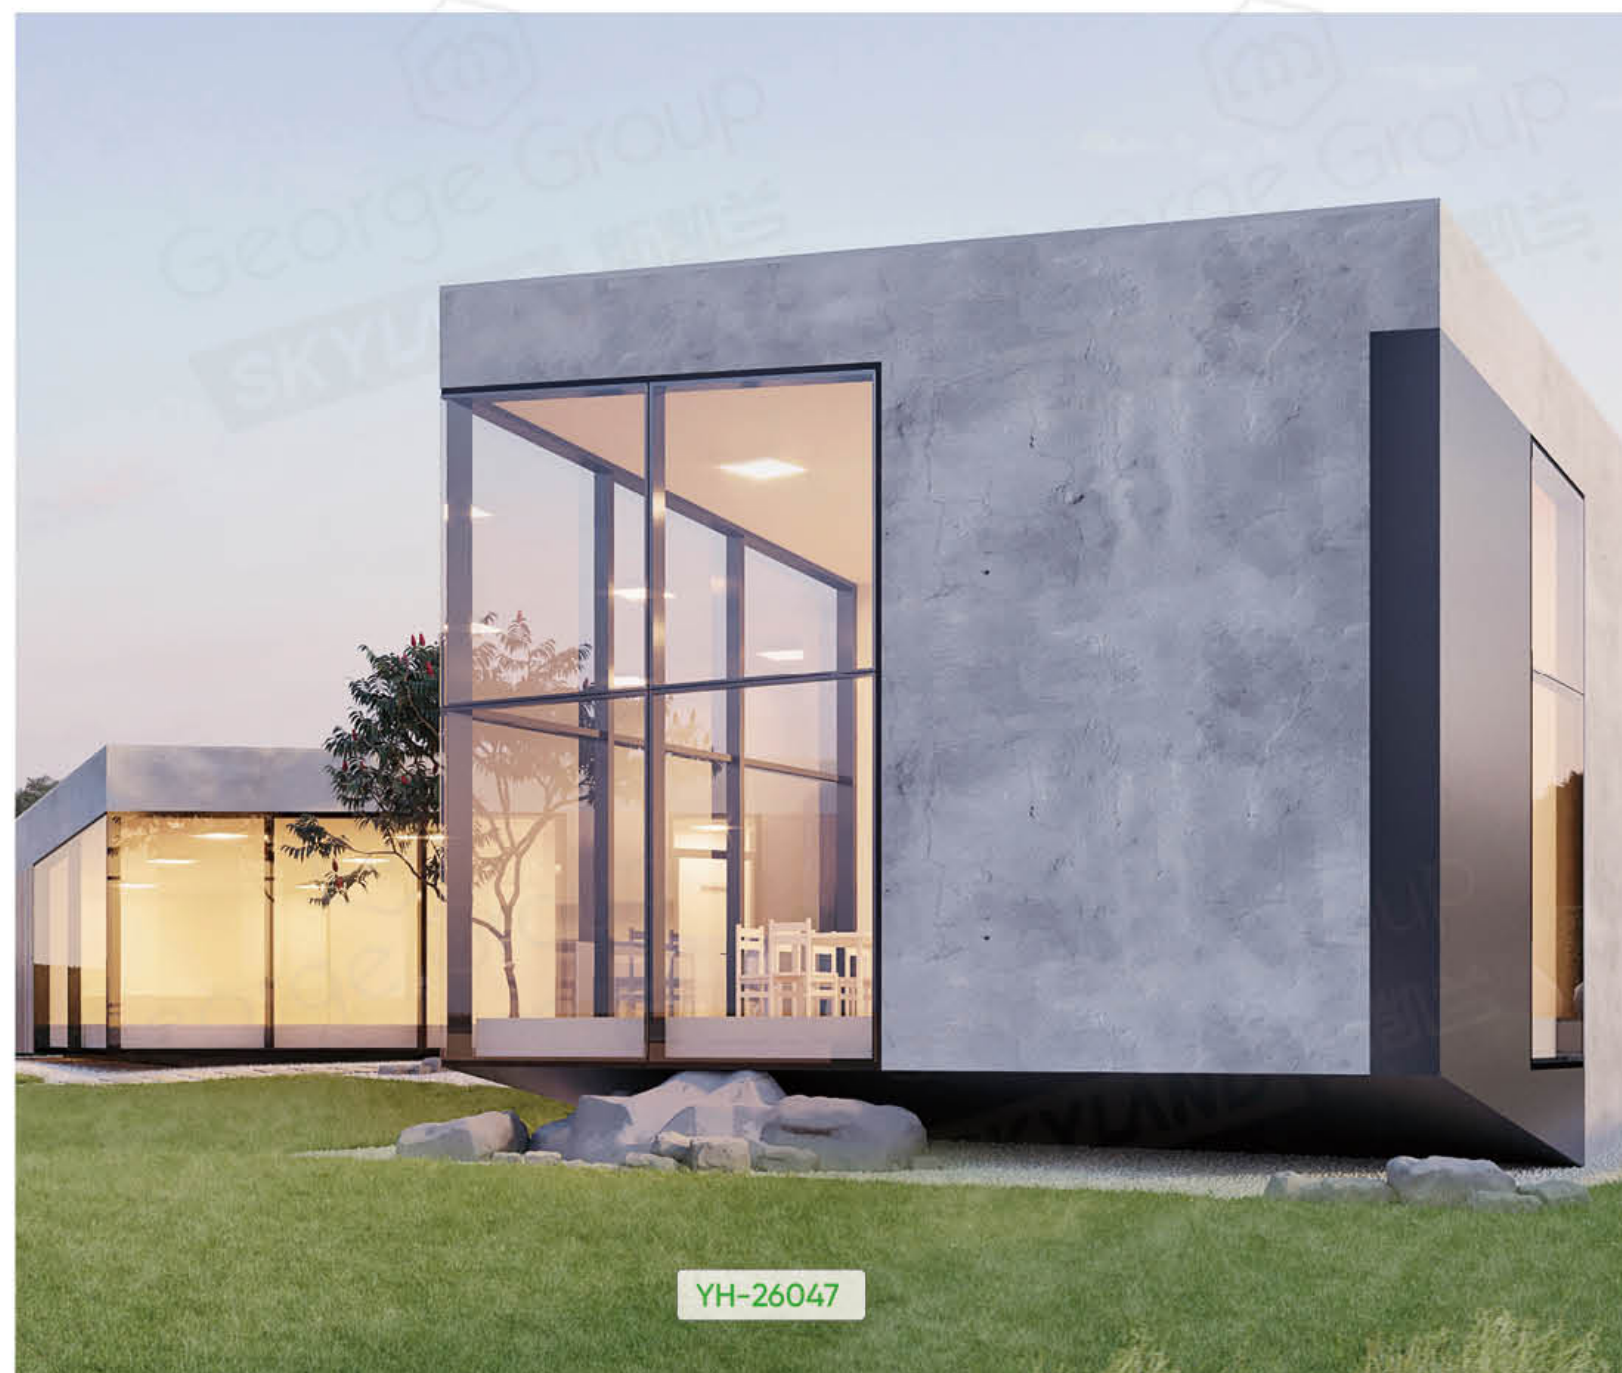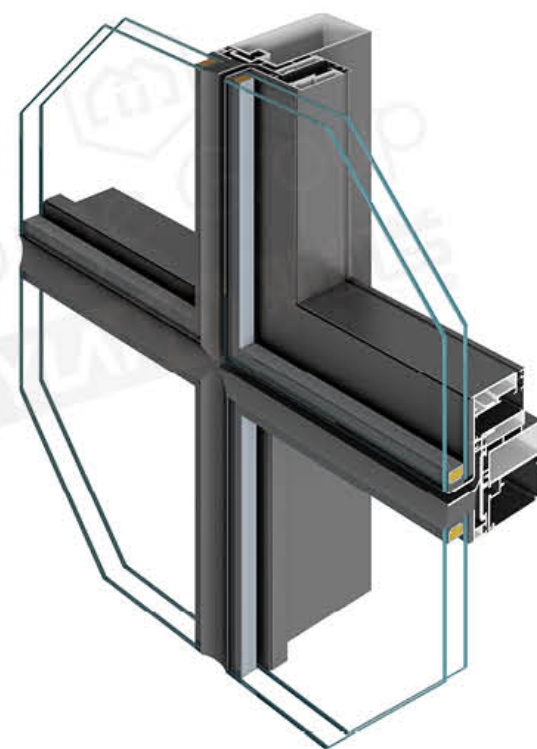


YH-26047

明框幕墙

STICK CURTAIN WALL

明框设计使金属框架成为建筑立面的重要元素，框架完全暴露于建筑表面，形成鲜明的线条分割效果，赋予建筑物独特的线条感和层次感。

The clear frame design makes the metal frame an important element of the building facade, fully exposed to the surface of the building, forming a distinct line segmentation effect, giving the building a unique sense of lines and hierarchy.

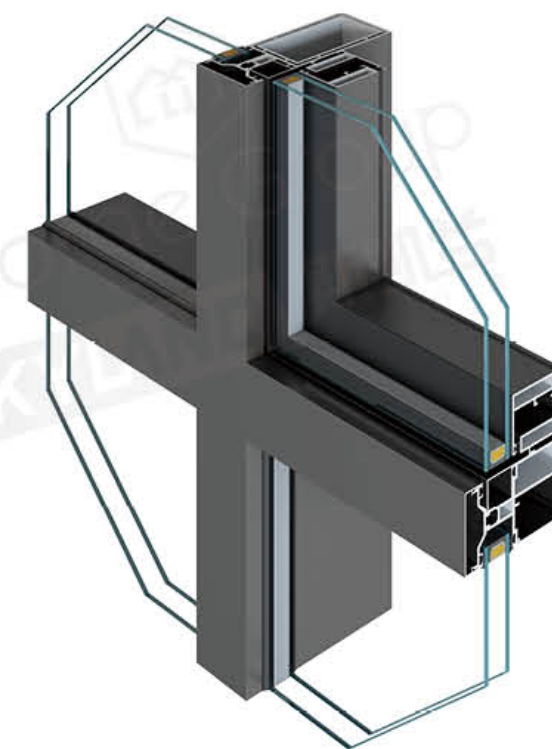

YH-26048

纱门 / 纱网

SCREEN DOOR/MESH

纱网具有良好的通风效果，其独特的网格设计能在炎热的夏季方便地引入室外新鲜空气，同时防止蚊虫进入室内。

The mesh has good ventilation effect, and its unique grid design can easily introduce fresh outdoor air in hot summer, while preventing mosquitoes from entering the room.



防护性能强
通风效果好

STRONG PROTECTIVE CAPABILITY
GOOD VENTILATION EFFECT

有效阻挡蚊虫、飞絮、落叶等外部侵扰；
且方便地引入室外新鲜空气，保持室内空气清新。

Effectively block external disturbances such as mosquitoes, flying fluff, and fallen leaves;
And conveniently introduce fresh outdoor air to keep indoor air fresh.



YH-26049



YH-26050




YH-26051

大 / 小 PD 门

LARGE/SMALL PD DOOR

PD 门是结合了推拉门与平开门功能的新型门，特点是可推拉、可平开，兼具空间灵活性与实用性。

PD door is a new type of door that combines the functions of sliding door and swing door, characterized by its ability to slide and open horizontally, combining spatial flexibility and practicality.

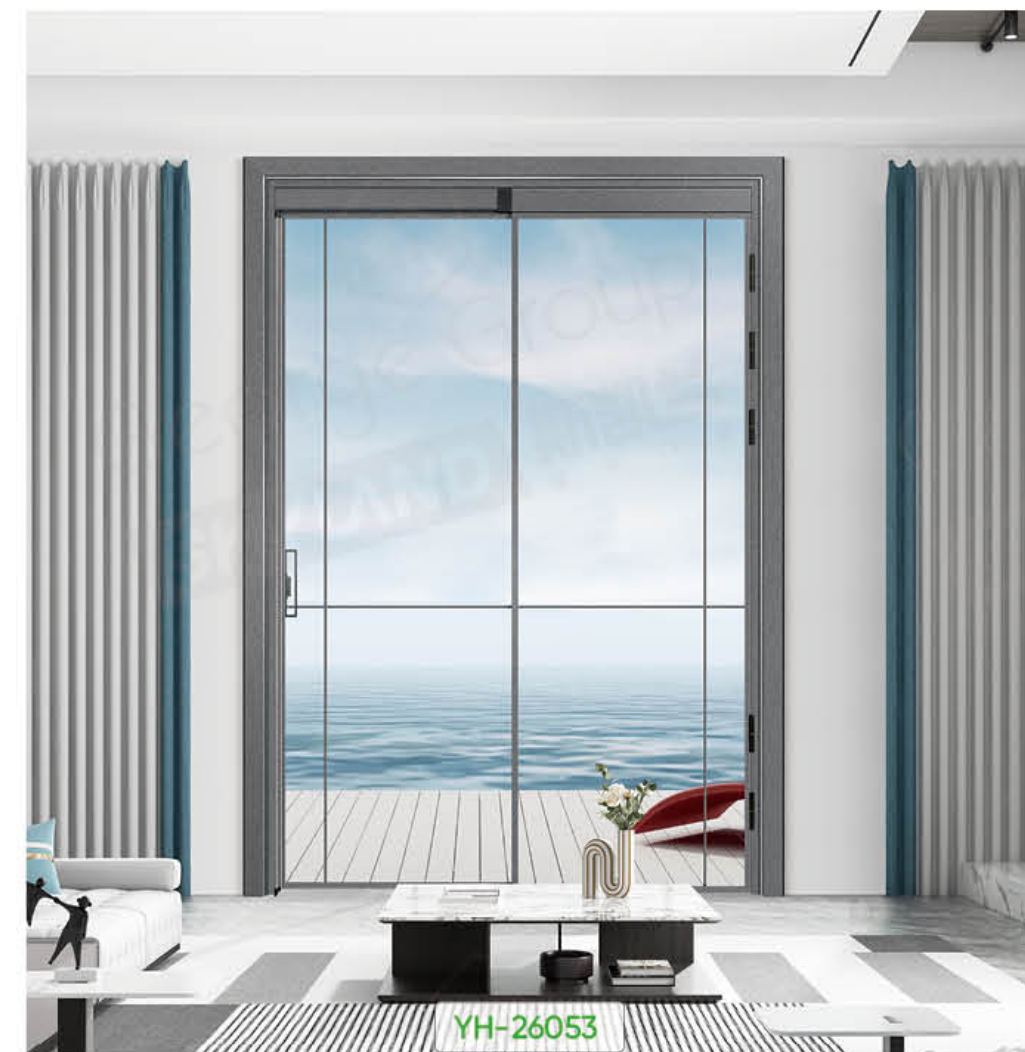

开启灵活
节省空间

ENABLE FLEXIBILITY
SAVE SPACE

可根据使用场景切换开启方式。日常通行用推拉门模式；需要大通风量时，切换为平开门模式。

The opening method can be switched according to the usage scenario. Sliding door mode for daily use; When a large airflow is required, switch to the swing door mode.




护栏

GUARDRAIL

玻璃护栏是一种安全防护设施，以其通透的视觉效果和良好的安全性能同时具备耐用、适配性强，在现代建筑中广泛应用。

Glass railings are a type of safety protection facility, widely used in modern architecture due to their transparent visual effect, excellent safety performance, durability, and strong adaptability.

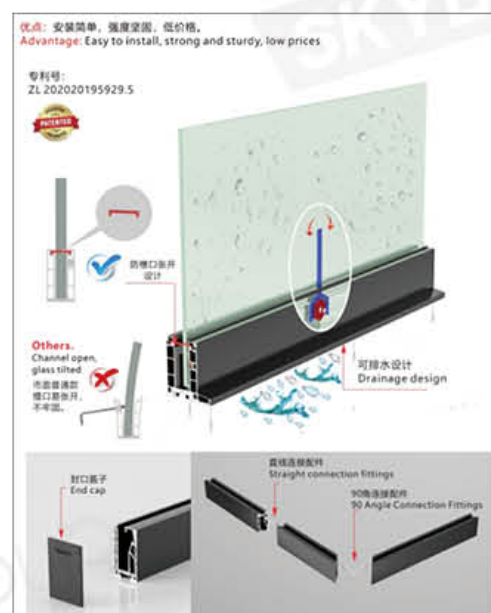

配件

ACCESSORIES



下轨承重静音轮
Underrail load-bearing silent wheel



防摆轮
Anti balance wheel



锁扣
buckle



推拉门锁
Sliding door lock



下轨推拉轮
Down track push-pull wheel



防台风轮
Typhoon resistant wheels



推拉窗单面锁
Sliding window single-sided lock



锁扣锁点
Lock buckle locking point



平开窗承重铰链
Casement window load-bearing hinge



平开窗纱网铰链
Flat opening window screen hinge



平开窗锁盒
Side hung window lock box



平开窗锁点锁扣
Side hung window lock point lock buckle



平开窗执手
Side hung window handle



平开窗合页
Casement window hinge